

## TSQP4-NAAJA1DXX/TSQP4-NAAJA1UXX Optical Pigtail Transceiver

### Multi-mode 850nm 100G BASE-SR4 QSFP28 Optical Pigtail Transceiver, With Diagnostic Monitoring

#### Features

- Hot-pluggable QSFP28 form factor
- Multi rate up to 25.78125 Gb/s
- 4 channels 850nm VCSEL laser array
- 4 channels 850nm PIN photo detector array
- Digital diagnostics functions are available via the I2C interface
- Single 3.3V Power Supply and Power Dissipation < 2.2W
- LC/PC pigtail connector

#### Applications

- 100GBASE SR4 Ethernet

#### Product Description.

The TSQP4-NAAJA1DXX/TSQP4-NAAJA1UXX is a four Channels, Fiber-Optic QSFP28 for 100Gbps SR4 Applications. It is a high performance module for short-range data communication and interconnect applications which operate at 25.78125Gbps up to 70m using OM3 fiber and 100m using OM4 fiber each lane. The optical interface uses 8 LC/PC pigtails (contains 4 Tx LC/PC pigtails and 4 Rx LC/PC pigtails) .

This module is designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 38 contact edge type connector.

#### Absolute Maximum Rating

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

| Parameters           | Symbol | Min. | Max. | Unit |
|----------------------|--------|------|------|------|
| Power Supply Voltage | VCC    | -0.5 | +3.6 | V    |
| Storage Temperature  | Tc     | -40  | +85  | °C   |
| Relative Humidity    | RH     | 0    | 85   | %    |

## Recommended Operating Environment

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

| Parameter                               | Symbol | Min  | Typical | Max  | Unit |
|---|--------|------|---------|------|------|
| Power Supply Voltage                    | VCC    | 3.15 | 3.30    | 3.45 | V    |
| Operating Case Temperature (Standard)   | Tca    | 0    | -       | 70   | °C   |
| Operating Case Temperature (Industrial) | Tca    | -40  | -       | 85   | °C   |

## Electrical characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter          | Symbol | Min | Typical  | Max | Unit |
|--------------------|--------|-----|----------|-----|------|
| Data Rate per lane | DR     | -   | 25.78125 | -   | Gbps |

## Transmitter Specifications

| Parameter                     | Symbol | Min | Typical | Max     | Unit     |
|-------------------------------|--------|-----|---------|---------|----------|
| Input differential impedance  | Rin    | -   | 100     | -       | $\Omega$ |
| Differential Data Input Swing | Vin    | 200 | -       | 1000    | mV       |
| Transmit Disable Voltage      | VD     | 2.0 | -       | VCC+0.3 | V        |
| Transmit Enable Voltage       | Ven    | Vee | -       | Vee+0.8 | V        |

## Receiver Specifications

| Parameter                      | Symbol | Min | Typical | Max     | Unit     |
|--------------------------------|--------|-----|---------|---------|----------|
| Output Differential Impedance  | Rout   | -   | 100     | -       | $\Omega$ |
| Differential Data Output Swing | Vout   | 200 | -       | 1000    | mV       |
| Loss of Signal –Asserted       | -      | 2.0 | -       | VCC+0.3 | V        |
| Loss of Signal –Negated        | -      | Vee | -       | Vee+0.8 | V        |

## Optical characteristics


The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                          | Symbol          | Min | Typical | Max | Unit |
|------------------------------------|-----------------|-----|---------|-----|------|
| <b>Transmitter</b>                 |                 |     |         |     |      |
| Center Wavelength                  | $\lambda$       | 840 | 850     | 860 | nm   |
| Average Optical Power <sup>1</sup> | Po              | -6  | -       | 2.4 | dBm  |
| Extinction Ratio <sup>2</sup>      | ER              | 3   | -       | -   | dB   |
| RMS spectral width                 | $\Delta\lambda$ | -   | -       | 0.6 | nm   |

|                                |       |     |   |       |     |
|--------------------------------|-------|-----|---|-------|-----|
| Optical Return Loss Tolerance  | ORL   | -   | - | 12    | dB  |
| <b>Receiver</b>                |       |     |   |       |     |
| Sensitivity <sup>3</sup>       | Rsens | -   | - | -10.3 | dBm |
| Receiver Overload <sup>3</sup> | Pmax  | 2.4 | - | -     | dBm |
| Los function                   | Los   | -30 | - | -12   | dBm |
| Receiver Reflectance           | -     | -   | - | -12   | dB  |

**Notes:**


1. The optical power is launched into MMF
2. Measured with a PRBS 231-1 test pattern @25.78125Gbps
3. Measured with a PRBS 231-1 test pattern @25.78125Gbps, BER=5E-5

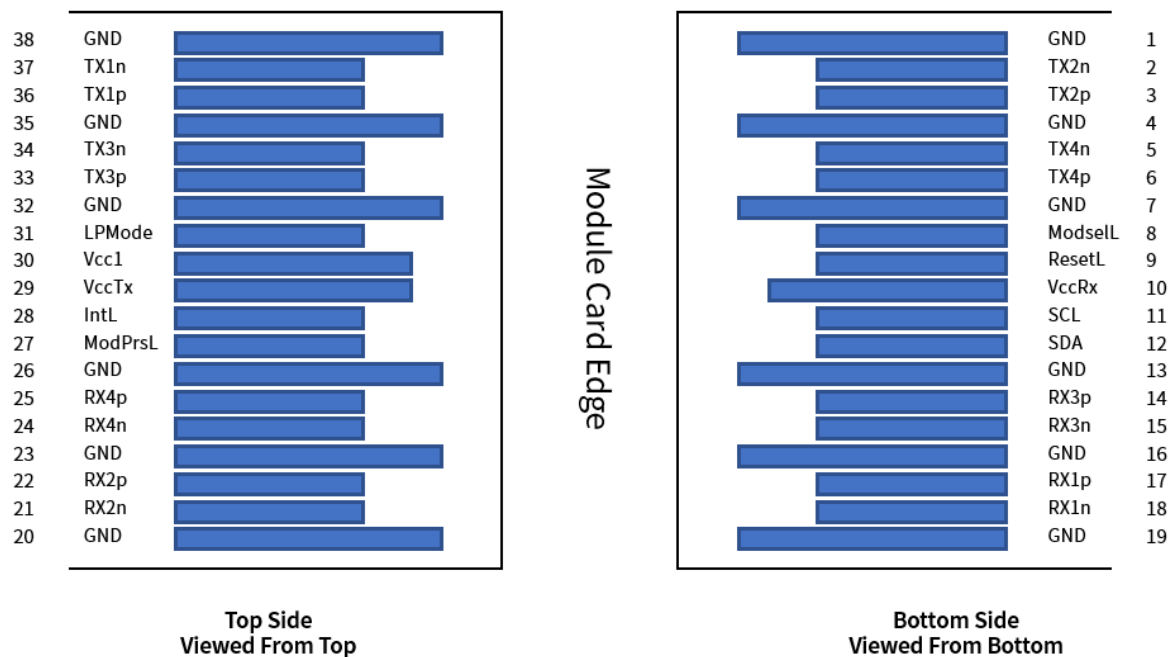**Transceiver Electrical Pad Layout (QSFP28 end)****Pin Definition (QSFP28 end)**

| Pin | Symbol  | Name/Description                    |
|-----|---------|-------------------------------------|
| 1   | GND     | Ground                              |
| 2   | Tx2n    | Transmitter Inverted Data Input     |
| 3   | Tx2p    | Transmitter Non-Inverted Data Input |
| 4   | GND     | Ground                              |
| 5   | Tx4n    | Transmitter Inverted Data Input     |
| 6   | Tx4p    | Transmitter Non-Inverted Data Input |
| 7   | GND     | Ground                              |
| 8   | ModSelL | Module Select                       |
| 9   | ResetL  | Module Reset                        |

|    |         |                                     |
|----|---------|-------------------------------------|
| 10 | Vcc Rx  | +3.3 V Power supply receiver        |
| 11 | SCL     | 2-wire serial interface clock       |
| 12 | SDA     | 2-wire serial interface data        |
| 13 | GND     | Ground                              |
| 14 | Rx3p    | Receiver Non-Inverted Data Output   |
| 15 | Rx3n    | Receiver Inverted Data Output       |
| 16 | GND     | Ground                              |
| 17 | Rx1p    | Receiver Non-Inverted Data Output   |
| 18 | Rx1n    | Receiver Inverted Data Output       |
| 19 | GND     | Ground                              |
| 20 | GND     | Ground                              |
| 21 | Rx2n    | Receiver Inverted Data Output       |
| 22 | Rx2p    | Receiver Non-Inverted Data Output   |
| 23 | GND     | Ground                              |
| 24 | Rx4n    | Receiver Inverted Data Output       |
| 25 | Rx4p    | Receiver Non-Inverted Data Output   |
| 26 | GND     | Ground                              |
| 27 | ModPrsL | Module Present                      |
| 28 | IntL    | Interrupt                           |
| 29 | VCC Tx  | +3.3 V Power supply transmitter     |
| 30 | VCC1    | +3.3 V Power Supply                 |
| 31 | LPMode  | Low Power Mode                      |
| 32 | GND     | Ground                              |
| 33 | Tx3p    | Transmitter Non-Inverted Data Input |
| 34 | Tx3n    | Transmitter Inverted Data Input     |
| 35 | GND     | Ground                              |
| 36 | Tx1p    | Transmitter Non-Inverted Data Input |
| 37 | Tx1n    | Transmitter Inverted Data Input     |
| 38 | GND     | Ground                              |

## Mechanical

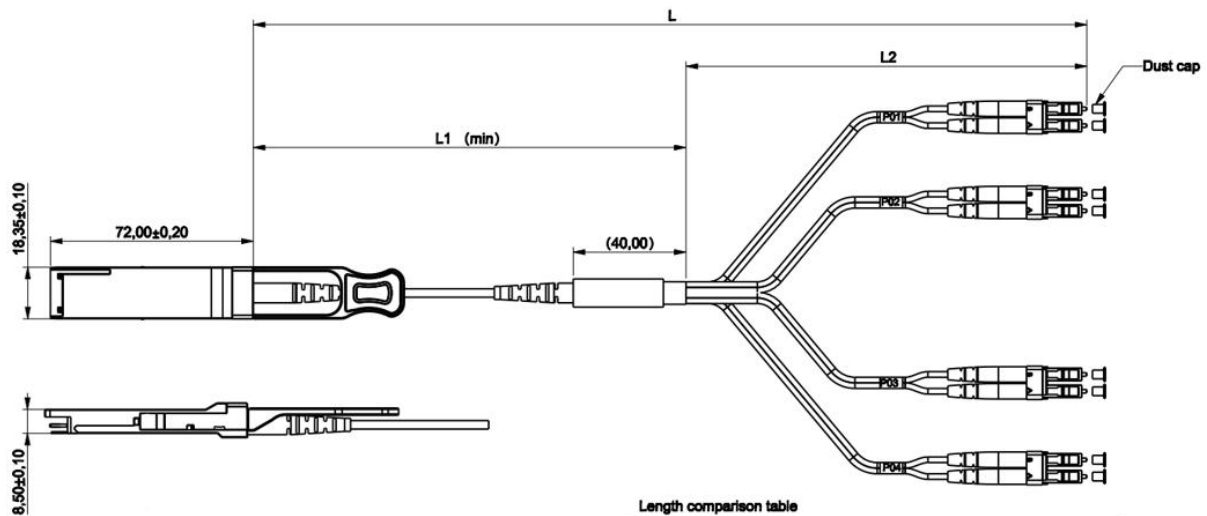

Length comparison table

| L   | L1   | L2   | Notes   |
|-----|------|------|---|
| 1m  | 30cm | 70cm | The tolerance for branches is +7/-0cm;<br>The length between different branches is +1/-0cm; |
| 2m  | 60cm | 1.4m |   |
| 3m  | 1m   | 2m   |   |
| ≥5m | L-3m | 3m   |   |


AOC product bagging circle size:

| L              | Disc fiber diameter (mm)                   |
|----------------|--|
| 1m ≤ L ≤ 5m    | 110 ≤ Inner diameter, outer diameter ≤ 160 |
| 5m < L ≤ 7m    | 110 ≤ Inner diameter, outer diameter ≤ 170 |
| 7m < L ≤ 30m   | 110 ≤ Inner diameter, outer diameter ≤ 180 |
| 30m < L ≤ 50m  | 110 ≤ Inner diameter, outer diameter ≤ 210 |
| 50m < L ≤ 100m | 110 ≤ Inner diameter, outer diameter ≤ 250 |

Length tolerance table:

| L             | Tolerance (mm) |
|---------------|----------------|
| L ≤ 1 M       | +70/-0         |
| 1 M < L < 7 M | +100/-0        |
| L ≥ 7 M       | +2% L/-0       |

## Cable Structure (QSFP28 end)

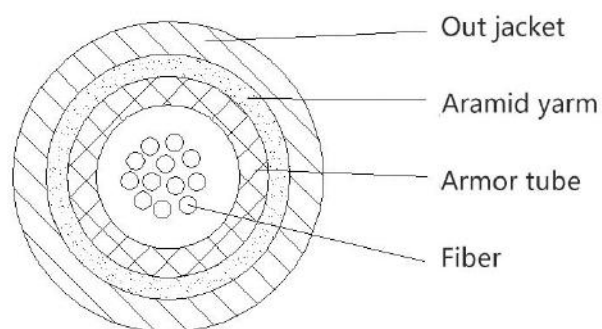

## Cable Technical Parameters (QSFP28 end)

| Parameter | Symbol | Typical  |
|-----------|--------|--|
| Model     |        | GJFKV  |
| Fiber     | Count  | 2~12   |
|           | Color  | Blue, orange, green, brown, gray, white, red, black, yellow, purple, |


Information and specifications are subject to change without notice.  
Please visit [www.china-tscom.com](http://www.china-tscom.com) for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China  
+86 755 32983688 | [info@china-tscom.com](mailto:info@china-tscom.com) | [www.china-tscom.com](http://www.china-tscom.com)



|                               |                           |             |
|-------------------------------|---------------------------|-------------|
|                               |                           | pink, aqua  |
| Cable                         | OD (mm)                   | 3.0±0.1     |
|                               | Material                  | PVC-OFNP    |
| Armored tube                  | OD (mm)                   | 1.8±0.1     |
|                               | ID (mm)                   | 1.2±0.1     |
| Max.tensile Strength(N)       | Short-term                | 150         |
|                               | Long-term                 | 80          |
| Min.Bending Radius(mm)        | Dynamic                   | 20D         |
|                               | Static                    | 10D         |
| Max.Crush Resistance(N/100mm) | Short-term                | 3000        |
|                               | Long-term                 | 1000        |
| Strength Members              |                           | Aramid yarn |
| Temperature range             | Storage or transportation | -20~70℃     |
|                               | Operation                 | -20~60℃     |
|                               | Installation              | -20~60℃     |

### Cable Structure (LC end)

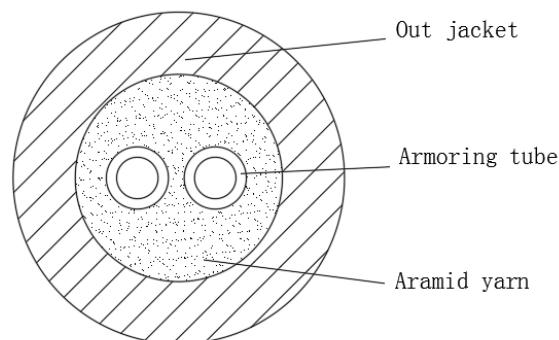

### Cable Technical Parameters (LC end)

| Parameter                     | Symbol     | Typical                      |
|-------------------------------|------------|------------------------------|
| Armored tube                  | OD(mm)     | 0.9±0.1                      |
|                               | ID(mm)     | 0.5±0.1                      |
|                               | Material   | Stainless steel spiral armor |
| Out jacket                    | OD(mm)     | 3.0±0.1                      |
|                               | Material   | PVC/LSZH                     |
| Nominal weight(kg/km)         |            | 13                           |
| Max.tensile Strength(N)       | Short-term | 100                          |
|                               | Long-term  | 50                           |
| Max.Crush Resistance(N/100mm) | Short-term | 3000                         |
|                               | Long-term  | 1000                         |

Information and specifications are subject to change without notice.  
Please visit [www.china-tscom.com](http://www.china-tscom.com) for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China  
+86 755 32983688 | [info@china-tscom.com](mailto:info@china-tscom.com) | [www.china-tscom.com](http://www.china-tscom.com)



|                          |                           |          |
|--------------------------|---------------------------|----------|
| Color                    | According to contract     |          |
| Strength Members         | Aramid yarn               |          |
| Environmental Protection | RoHS COMPLIANT            |          |
| Temperature range        | Storage or transportation | -20~70°C |
|                          | Operation                 | -20~60°C |
|                          | Installation              | -20~60°C |

## Ordering Information

| Part Number                                    | Product Description  |
|--|--|
| TSQP4-NAAJA1DXX                                | 100Gbps QSFP28 MMF Armored Optical Pigtail Transceiver 0°C ~ +70°C   |
| TSQP4-NAAJA1UXX                                | 100Gbps QSFP28 MMF Armored Optical Pigtail Transceiver -40°C ~ +85°C |
| XXX :001~070,1~70 Length in meters on OM3 MMF  |  |
| XXX :001~100,1~100 Length in meters on OM4 MMF |  |

## Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.