

TSSL5-DXXCK8C Optical Transceiver

DWDM SFP+ Single-mode Transceiver, With Diagnostic Monitoring
Duplex SFP+ 80km Transceiver

Features

- Compliant to SFP+ MSA
- All metal housing for superior EMI performance
- Operating data rate up to 9.95 to 11.3Gbps
- 1550nm EML transmitter
- High sensitivity APD photodiode and TIA
- LC duplex connector
- Hot pluggable 20pin connector
- Low power consumption <2.2W
- 0°C to 70°C operating wide temperature range
- Single +3.3V±5% power supply
- Digital Monitoring SFF-8472 Rev10.2 compliant
- Fully RoHS Compliant

Applications

- 10GBASE-ZR/ZW
- 10G Fiber Channel
- SFP+ MSA (SFF-8472)
- IEEE802.3ae

Product Description

The laser based 10Gigabit SFP+ Transceiver is designed to transmit and receive serial optical data over single mode optical fiber with 80Km.

They are compliant with SFF-8431, SFF-8432, 10GFC Rev 4.0, and 10GBASE-ZR/ZW. The transmitter converts serial CML electrical data into serial optical data compliant with the IEEE 802.3ae standard. The receiver converts serial optical data into serial CML electrical data. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Absolute Maximum Ratings

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameters	Symbol	Min.	Max.	Unit
Power Supply Voltage	VCC	-0.5	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Relative Humidity	RH	0	95	%

Recommended Operating Conditions

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	VCC	3.14	3.3	3.46	V
Operating Case Temperature	Tc	0	-	70	°C

Notes:

[1] Supply current is shared between VCCTX and VCCR_X.

[2] In-rush is defined as current level above steady state current requirements.

Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max	Unit
Transmitter					
Data Rate	BR	9.95	-	11.3	Gbps
Input differential impedance ¹	R _{IN}	80	100	120	Ω
Differential Data Input	V _{IN}	180	-	700	mVp-p
Transmit Disable Voltage	V _{DIS}	2.0	-	VCCHOST	V
Transmit Enable Voltage ²	V _{EN}	V _{EE}	-	VEE+0.8	V
Transmit Fault Assert Voltage	V _{fa}	2.0	-	VCCHOST	V
Transmit Fault De-Assert Voltage	V _{FDA}	V _{EE}	-	VEE+0.4	V
Receiver					
Data Rate	BR	9.95	-	11.3	Gbps
Output differential impedance ¹	R _{out}	80	100	120	Ω
Differential Data Output	V _{OD}	350	-	850	mVp-p
Output Rise Time	t _{RISE}	25	-	-	pS
Output Fall Time	t _{FALL}	25	-	-	pS
LOS Fault	V _{LOSFT}	2.0	-	VCCHOST	V
LOS Normal	V _{LOSNR}	V _{EE}	-	VEE+0.4	V

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



Notes:

[1] AC coupled.

[2] Or open circuit.

Transmitter Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Center Wavelength	λ	-	DWDM	-	nm
Side Mode Suppression Ratio	SMSR	30	-	-	dB
Average Optical Power	P _o	0	-	4	dBm
Extinction Ratio	ER	8.2	-	-	dB
Average Launch Power of OFF Transmitter	P _{OFF}	-	-	-30	dBm
Relative Intensity Noise	R _{IN}	-	-	-128	dB/Hz


Receiver Specifications – Optical

Parameter	Symbol	Min	Typical	Max	Unit
Center Wavelength	λ	1260	-	1620	nm
Receiver sensitivity ¹	RSEN	-	-	-24	dBm
Receiver Sensitivity at @80km fiber ²	RSEN	-	-	-21	dBm
Receiver Overload	PMAX	-7	-	-	dBm
Optical Return Loss	RRL	-	-	-27	dB
LOS Asserted	LSA	-37	-	-	dBm
LOS De-Asserted	LDA	-	-	-27	dBm
LOS Hysteresis	LH	0.5	-	-	dB

Notes:[1] Measured at 1528- 1600nm, ER>8.2dB, BER less than 10E-12 and PRBS 2³¹-1 test pattern.

[2] loopback using 80km fiber (SMF-28)

SFP+ Transceiver Electrical Pad Layout

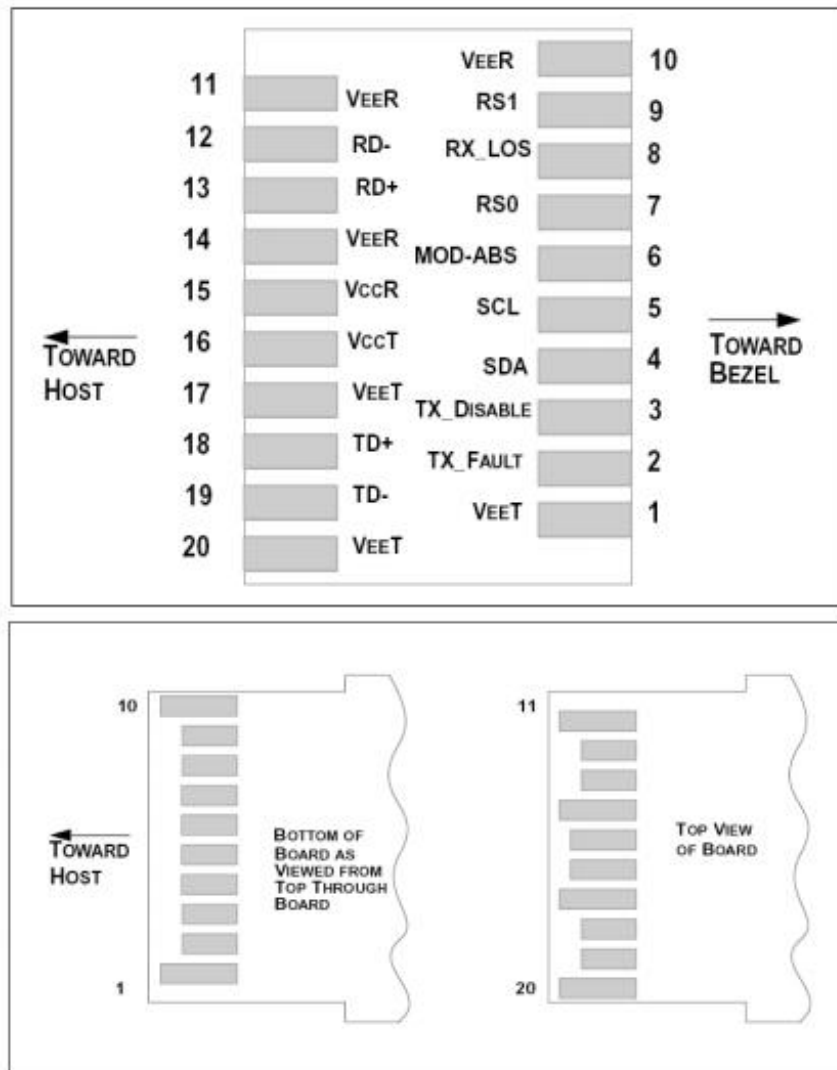

Pin definition

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground
2	Tx_FAULT [2]	Transmitter Fault
3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open
4	SDA [2]	2-wire Serial Interface Data Line
5	SCL [2]	2-wire Serial Interface Clock Line
6	MOD_ABS [4]	Module Absent. Grounded within the module
7	RS0 [5]	Rate Select 0
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1 [5]	Rate Select 1
10	VEER [1]	Receiver Ground

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



11	VEER [1]	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER [1]	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply
17	VEET [1]	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET [1]	Transmitter Ground

Notes:

[1] Module circuit ground is isolated from module chassis ground within the module.

[2] Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.

[3] Tx_Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VCCT inside the module.

[4] Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to VCC_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.

[5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.

Mechanical

XX	Frequency (THz)	Center WaveLength (nm)	XX	Frequency (THz)	Center WaveLength (nm)
21	192.10	1560.61	01	192.15	1560.2
22	192.20	1559.79	02	192.25	1559.39
23	192.30	1558.98	03	192.35	1558.58
24	192.40	1558.17	04	192.45	1557.77
25	192.50	1557.36	05	192.55	1556.96
26	192.60	1556.55	06	192.65	1556.15
27	192.70	1555.75	07	192.75	1555.34
28	192.80	1554.94	08	192.85	1554.54
29	192.90	1554.13	09	192.95	1553.73
30	193.00	1553.33	10	193.05	1552.93
31	193.10	1552.52	11	193.15	1552.12
32	193.20	1551.72	12	193.25	1551.32
33	193.30	1550.92	13	193.35	1550.52
34	193.40	1550.12	14	193.45	1549.72
35	193.50	1549.32	15	193.55	1548.91
36	193.60	1548.51	16	193.65	1548.11
37	193.70	1547.72	17	193.75	1547.32
38	193.80	1546.92	18	193.85	1546.52
39	193.90	1546.12	19	193.95	1545.72
40	194.00	1545.32	20	194.05	1544.92
41	194.10	1544.53	62	194.15	1544.13

42	194.20	1543.73	63	194.25	1543.33
43	194.30	1542.94	64	194.35	1542.54
44	194.40	1542.14	65	194.45	1541.75
45	194.50	1541.35	66	194.55	1540.95
46	194.60	1540.56	67	194.65	1540.16
47	194.70	1539.77	68	194.75	1539.37
48	194.80	1538.98	69	194.85	1538.58
49	194.90	1538.19	70	194.95	1537.79
50	195.00	1537.4	71	195.05	1537
51	195.10	1536.61	72	195.15	1536.22
52	195.20	1535.82	73	195.25	1535.43
53	195.30	1535.04	74	195.35	1534.64
54	195.40	1534.25	75	195.45	1533.86
55	195.50	1533.47	76	195.55	1533.07
56	195.60	1532.68	77	195.65	1532.29
57	195.70	1531.9	78	195.75	1531.51
58	195.80	1531.12	79	195.85	1530.72
59	195.90	1530.33	80	195.95	1529.94
60	196.00	1529.55	81	196.05	1529.16
61	196.10	1528.77			

Ordering Information

Part Number	Product Description
TSSLS-DXXCK8C	10Gbps SFP+ 80km Transceiver, 0°C ~ +70°C

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.