

TSSPS-NAACB1CXX/TSSPS-NAACB1TXX Optical Pigtail Transceiver

Multi-mode 10G SFP+ SR Optical Pigtail Transceiver, With Diagnostic Monitoring

Features

- Hot Pluggable
- LC/PC pigtail connector
- Optical interface compliant to IEEE 802.3ae
- Electrical interface compliant to SFF-8431
- 2-wire interface with integrated Digital Diagnostic monitoring
- Data rate up to 11.3Gbps
- 850nm VCSEL transmitter, PIN photo-detector
- Maximum link length of 300m on OM3 MMF
- Power Dissipation < 1.0W
- RoHS6 compliant (lead free)

Applications

- 10GBASE-SR at 10.3125Gbps
- 10GBASE-SW at 9.953Gbps

Product Description

The TSSPS-NAACB1CXX/TSSPS-NAACB1TXX is a Single-Channel, Pluggable, Fiber-Optic SFP+ for 10.3125Gbps SR Applications. It is a high performance module for short-range data communication and interconnect applications which operate at 10.3125Gbps up to 82m on OM2 MMF and 300m on OM3 MMF.

This module is designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 20 contact edge type connector.

Absolute Maximum Rating

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameters	Symbol	Min.	Max.	Unit
Power Supply Voltage	VCC	-0.5	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Relative Humidity	RH	0	85	%

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



Recommended Operating Conditions

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Power Supply Voltage	VCC	3.15	3.3	3.45	V
Operating Case Temperature (Standard)	Tca	0	-	70	°C
Operating Case Temperature (Industrial)	Tca	-40	-	85	°C

Notes:

1. Supply current is shared between VCCTX and VCCR_X.
2. In-rush is defined as current level above steady state current requirements.

Electrical characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Transmitter					
Data Rate	Mra	1.0	10.3	11.3	Gbps
Input differential impedance ¹	Rin	-	100	-	Ω
Differential Input Voltage swing	Vin	150	-	1200	mV
Transmit Disable Voltage	VD	2.0	-	VCC+0.3	V
Transmit Enable Voltage ²	Ven	Vee	-	Vee+0.8	V
Transmit Disable Assert Time	Vn	-	-	100	us
Receiver					
Data Rate	Mra	-	10.3	11.3	Gbps
Output differential impedance ¹	Rout	-	100	-	Ω
Differential Output Swing ³	Vout	300	-	700	mV
Loss of Signal –Asserted ⁴	-	2.0	-	VCC+0.3	V
Loss of Signal –Negated ⁴	-	Vee	-	Vee+0.8	V

Notes:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min	Typical	Max	Unit
Transmitter					
Center Wavelength	λ	840	850	860	nm
Average Optical Power ¹	Po	-6.0	-	-1	dBm
Extinction Ratio ²	ER	3.5	-	-	dB
Transmitter Dispersion Penalty	TDP	-	-	3.9	dB
Optical Return Loss Tolerance	ORL	-	-	12	dB
Receiver					
Receiver Sensitivity in OMA ³	Rsens	-	-	-11.1	dBm
Stressed Sensitivity in OMA ³	-	-	-	-7.5	dBm
Los function	Los	-30	-	-12	dBm
Receiver Overload ³	Pmax	-1.0	-	-	dBm
Receiver Reflectance	-	-	-	-12	dB


Notes:

1. The optical power is launched into MMF
2. Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps
3. Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps, BER≤10⁻¹².

Low Speed Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
TX_Fault, RX_LOS	VOL	0	-	0.4	V
	VOH	Host_VCC-0.5	-	Host_VCC+0.3	V
TX_DIS	VIL	-0.3	-	0.8	V
	VIH	2.0	-	VCCT+0.3	V
RS0,RS1	VIL	-0.3	-	0.8	V
	VIH	2.0	-	VCCT+0.3	V

SFP+ Transceiver Electrical Pad Layout

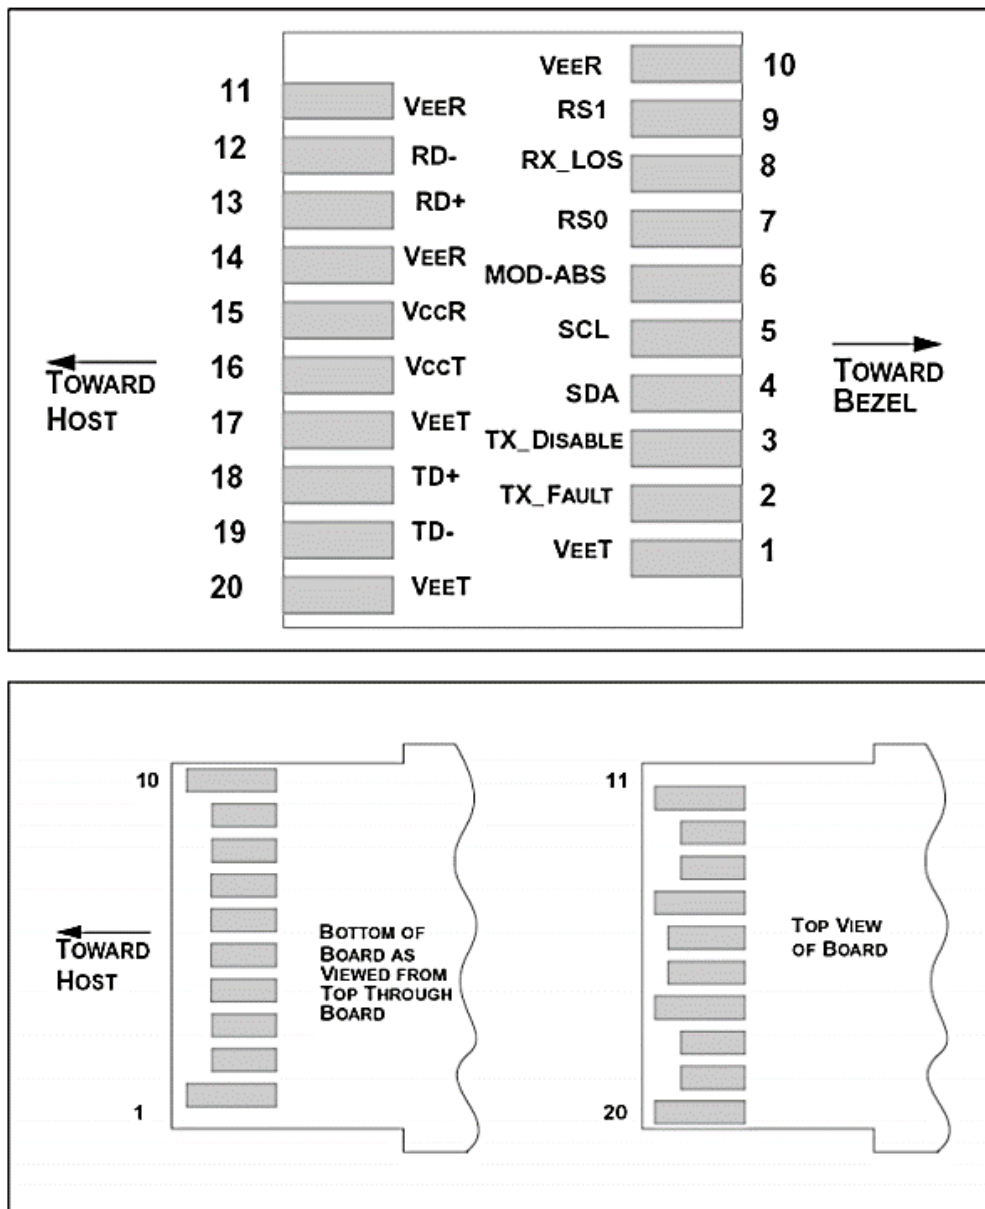

Pin Definition

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground
2	Tx_FAULT [2]	Transmitter Fault
3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open
4	SDA [2]	2-wire Serial Interface Data Line
5	SCL [2]	2-wire Serial Interface Clock Line
6	MOD_ABS [4]	Module Absent. Grounded within the module
7	RS0 [5]	Rate Select 0
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information


8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



9	RS1 [5]	Rate Select 1
10	VEER [1]	Receiver Ground
11	VEER [1]	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER [1]	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply
17	VEET [1]	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET [1]	Transmitter Ground

Notes:

1. Module circuit ground is isolated from module chassis ground within the module.
2. Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.45V.
3. Tx_Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VccT inside the module.
4. Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to VCC_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.

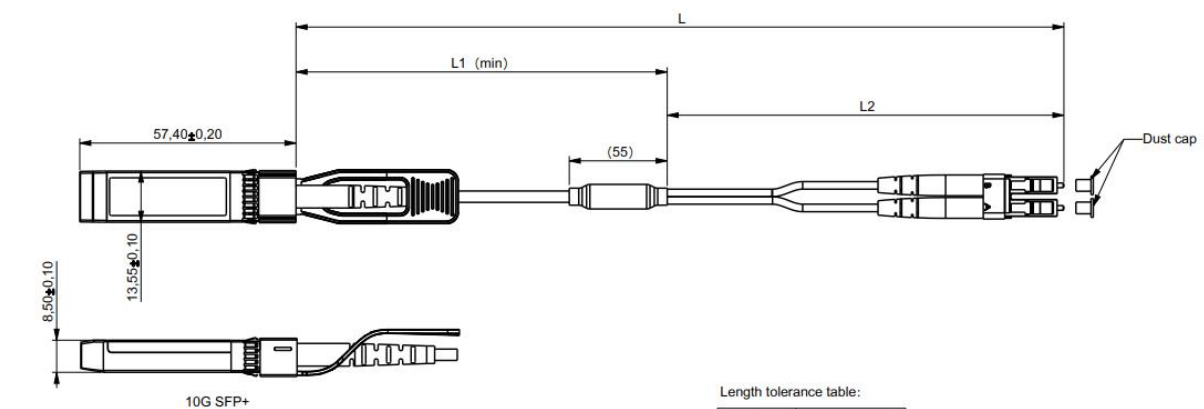Mechanical

Length comparison table

L	L1	L2	Notes
1m	30cm	70cm	The tolerance for branches is +7/-0cm; The length between different branches is +1/-0cm;
2m	60cm	1.4m	
3m	1m	2m	
≥5m	L-3m	3m	

Length tolerance table:

L	Tolerance (mm)
L ≤ 1 M	+70/-0
1 M < L < 7 M	+100/-0
L ≥ 7 M	+2% L/-0

Ordering Information

Part Number	Product Description
TSSPS-NAACB1CXX	10G SFP+ SR Optical Pigtail Transceiver 82m on OM2 MMF and 300m on OM3 MMF 0°C ~ +70°C
TSSPS-NAACB1TXX	10G SFP+ SR Optical Pigtail Transceiver 82m on OM2 MMF and 300m on OM3 MMF -40°C ~ +85°C

XX: 01~82, 1~82 pigtail Length in meters on OM2 MMF

References

1. “Specifications for Enhanced Small Form Factor Pluggable Module SFP+” , SFF-8431, Rev 4.1, July 6, 2009.
2. “Improved Pluggable Form factor” , SFF-8432, Rev 4.2, Apr 18, 2007
3. IEEE802.3ae – 2002
4. “Diagnostic Monitoring Interface for Optical Transceivers” SFF-8472, Rev 10.3, Dec 1, 2007

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.