

TSQ4S-85L-XXXD Active Optical Cable

Multi-Mode 200G BASE SR4 QSFP56 TO 4x50G BASE SR SFP56 Active Optical Cable, With Diagnostic Monitoring

Features

- 4-channel full-duplex active optical cable
- Data rate up to 53.125 Gbps per lane
- Compliant to the QSFP56 MSA /SFP56 MSA
- VCSEL Array Transmitter and PIN Array Receiver
- Low Power Dissipation: QSFP56 <5.5W; SFP56 <3W
- Operating case temperature -5°C to 70°C
- RoHS compliant

Applications

- IEEE 802.3bm 100GBASE SR4 Ethernet
- IEEE 802.3by 25GBASE SR Ethernet
- IEEE 802.3cd 200GBASE SR4 Ethernet
- IEEE 802.3cd 50GBASE SR Ethernet

Product Description

The TSQ4S-85L-XXXD is a 4-Channel, Pluggable, Parallel, Fiber-Optic 200G QSFP56 to 4X50G SFP56 AOC. This transceiver is a high performance module for short-range multi-lane data communication and interconnect applications. It integrates 4 data lanes in each direction with 200Gbps bandwidth.

These modules are designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 38@QSFP56 and 20@SFP56 contact edge type connector.

Absolute Maximum Rating

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameters	Symbol	Min.	Max.	Unit
Power Supply Voltage	VCC	-0.5	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Relative Humidity	RH	0	85	%

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



Recommended Operating Environment

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	VCC	3.15	3.30	3.45	V
Case Operating Temperature	Tca	-5	-	70	°C
Data Rate Per Lane	DR	-	53.125	-	Gbps
Fiber Bend Radius	Rb	3	-	-	cm

Notes:

1. Supply current is shared between VCCTX and VCCR_X.
2. In-rush is defined as current level above steady state current requirements.


Transmitter Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Input differential impedance	R _{in}	90	100	110	Ω
Differential Input Voltage swing, per lane	V _{in}	300	-	1100	mV
Transmit Disable Voltage	VD	2.0	-	VCC+0.3	V
Transmit Enable Voltage	V _{en}	V _{ee}	-	V _{ee} +0.8	V

Receiver Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Differential Output Swing, per lane	V _{out}	300	-	900	mV
Bit Error Rate@53.125 Gbps	BER1	-	-	2.4E-4	-
Bit Error Rate@25.78125 Gbps	BER2	-	-	5E-5	-
Output Differential Impedance	R _{out}	90	100	110	Ω
Loss of Signal –Asserted	-	2.0	-	VCC+0.3	V
Loss of Signal –Negated	-	V _{ee}	-	V _{ee} +0.8	V

Transceiver Electrical Pad Layout (QSFP56 end)

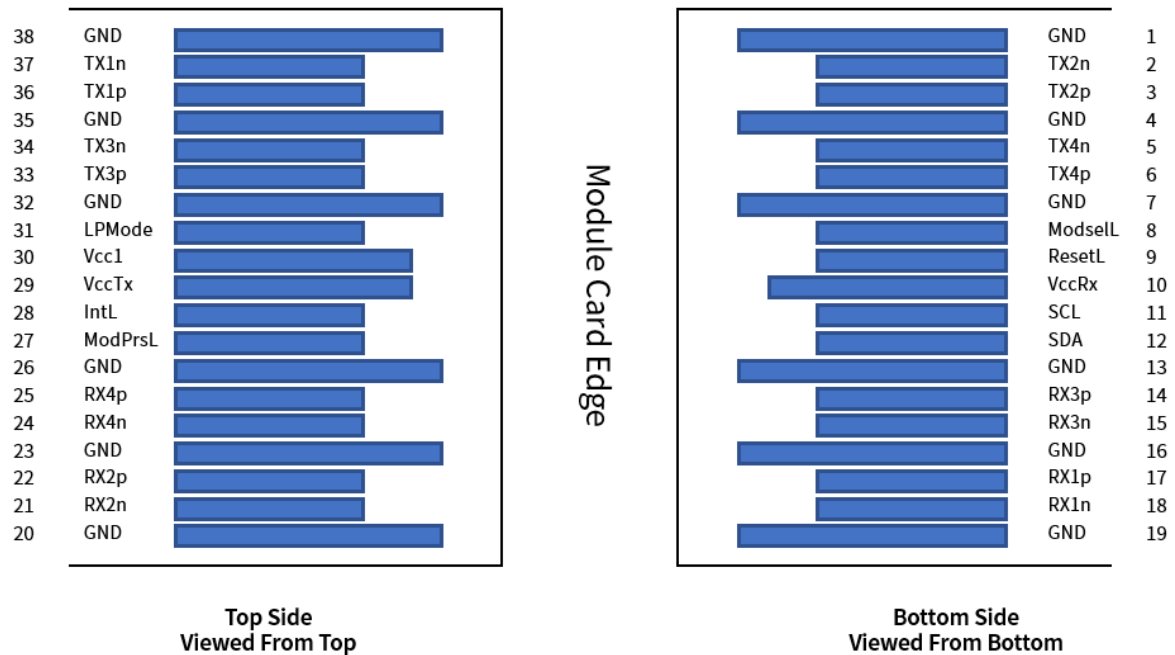


Pin Definition (QSFP56 end)

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground

20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt
29	VCC Tx	+3.3 V Power supply transmitter
30	VCC1	+3.3 V Power Supply
31	LPMode	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Transceiver Electrical Pad Layout (SFP56 end)

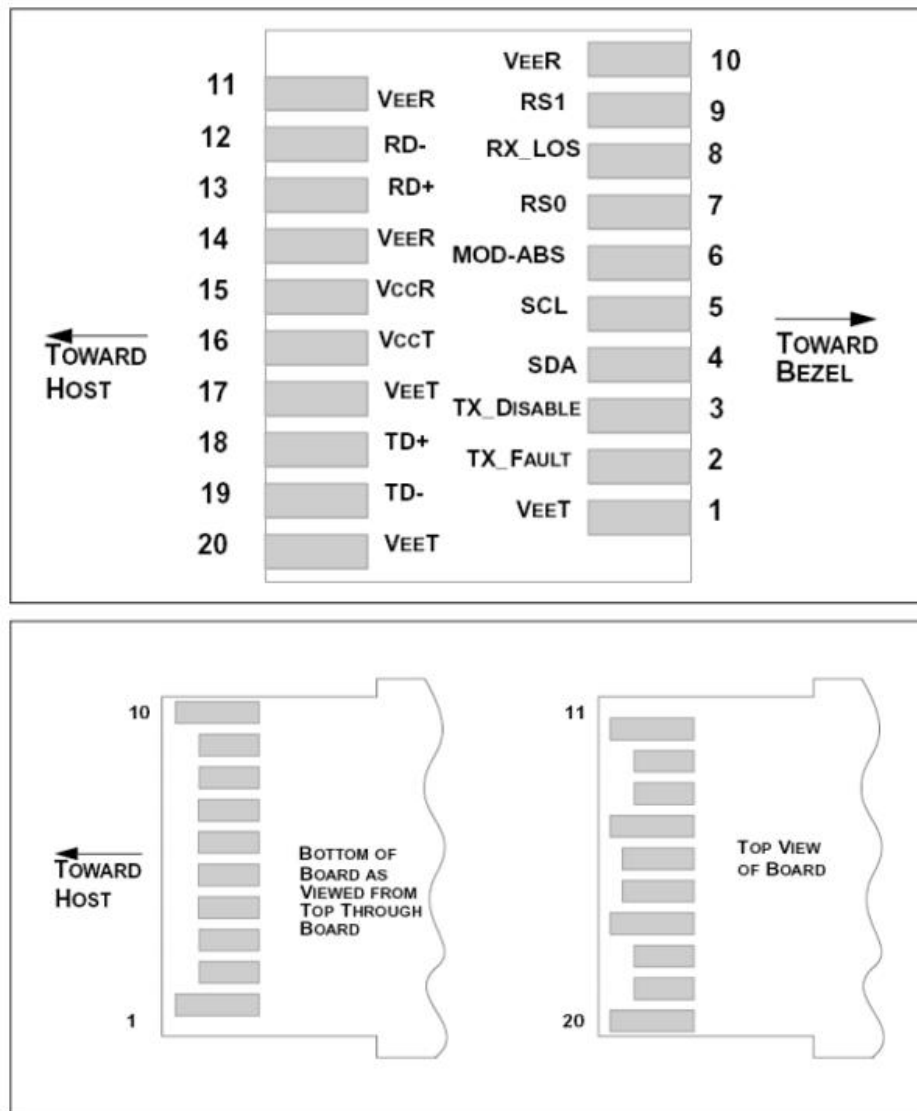

Pin Definition (SFP56 end)

Pin	Symbol	Name/Description
1	VEET	Transmitter Ground
2	Tx_FAULT	Transmitter Fault
3	Tx_DIS	Transmitter Disable. Laser output disabled on high or open
4	SDA	2-wire Serial Interface Data Line
5	SCL	2-wire Serial Interface Clock Line
6	MOD_ABS	Module Absent. Grounded within the module
7	RS0	Rate Select 0
8	RX_LOS	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1	Rate Select 1
10	VEER	Receiver Ground


Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



11	VEER	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply
17	VEET	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET	Transmitter Ground


Mechanical

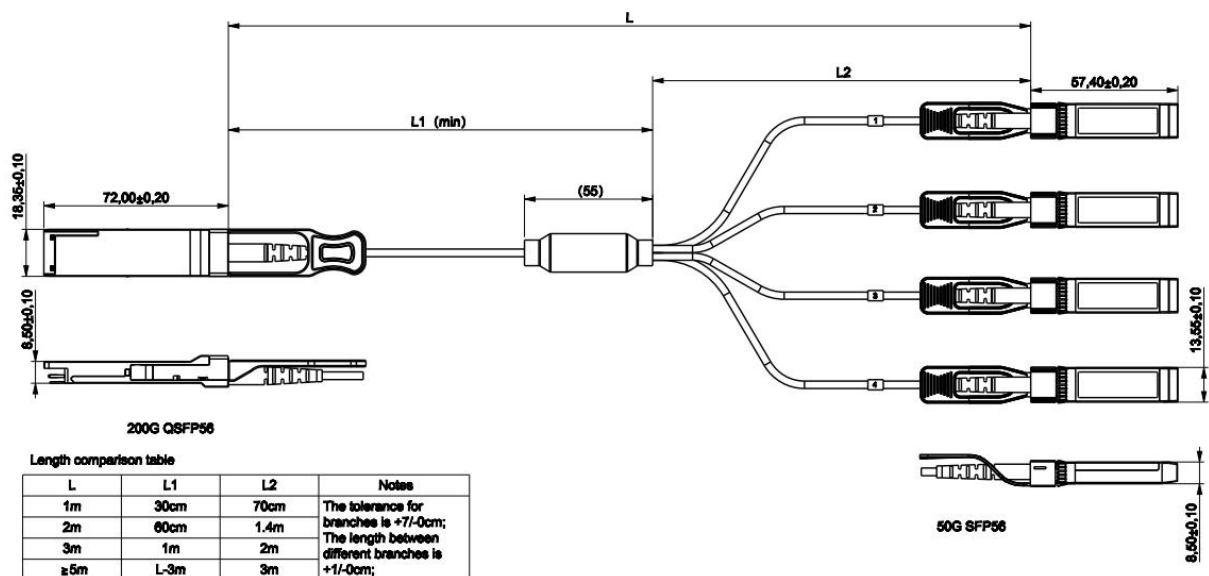

Length tolerance table:

L	Tolerance (mm)
$L \leq 1 \text{ M}$	+70/-0
$1 \text{ M} < L < 7 \text{ M}$	+100/-0
$L \geq 7 \text{ M}$	+2%L/-0

Cable Structure

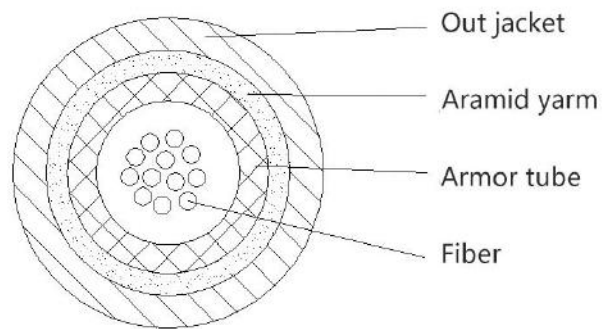

Cable Technical Parameters

Parameter	Symbol	Typical
Model		GJFKV
Fiber	Count	2~12
	Color	Blue, orange, green, brown, gray, white, red, black, yellow, purple, pink, aqua
Cable	OD (mm)	3.0 ± 0.1
	Material	PVC-OFNP
Armored tube	OD (mm)	1.8 ± 0.1
	ID (mm)	1.2 ± 0.1
Max.tensile Strength(N)	Short-term	150
	Long-term	80
Min.Bending Radius(mm)	Dynamic	20D
	Static	10D
Max.Crush Resistance(N/100mm)	Short-term	3000
	Long-term	1000
Strength Members		Aramid yarn
Temperature range	Storage or transportation	-20~70°C
	Operation	-20~60°C
	Installation	-20~60°C

Ordering Information

Part Number	Product Description
TSQ4S-85L-XXXD	200G QSFP56 TO 4x50G SFP56 Armored AOC -5°C ~ +70°C
XXX :001~070,1~70 Length in meters on OM3 MMF	
XXX :001~100,1~100 Length in meters on OM4 MMF	

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.