


## Fused WDM

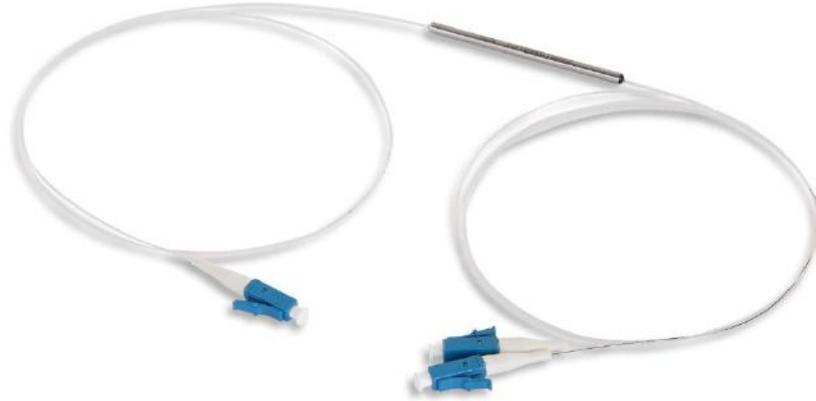

### Features

- Passed Telcordia GR-1221-CORE, and 85°C/ 85%RH test up to 1500 hours.
- High isolation

### Technical Specification

Item		Unit	Parameter			
Type		--	1310/1550 WDM			
Bandwidth		(nm)	±15			
Grade		--	Normal		HI-WDM	
			P	S	P	S
Insertion Loss	MAX	(dB)	0.25	0.30	0.35	0.50
Isolation	MIN	(dB)	17	16	34	32
PDL	MAX	(dB)	0.20		0.30	
Return Loss		(dB)	≥55			
Directivity		(dB)	≥55			
Operating Temperature		(°C)	-20 ~ 75			
Fiber type		--	Corning SMF-28e			
Pigtail type		--	ø250μm,0.9mm,2.0mm,3.0mm			
Fiber length		m	1 ,or on request			
Package		mm	ø3*55,ø3*60,90*20*10,100*80*10			