

TSQ2Q-85L-XXXDA Active Optical Cable

Multi-Mode 200G BASE QSFP56 TO 2x100G BASE QSFP28 Active Optical Cable,
With Diagnostic Monitoring

Features

- QSFP56 data rate 53.125 Gbps PAM4 modulation per lane
- QSFP28 data rate 25.78 Gbps NRZ modulation per lane
- Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- 850nm VCSEL array
- PIN photo detector array
- Single 3.3V power supply
- Low power dissipation: QSFP56/QSFP28< 5.5W (Each End)
- Built-in digital diagnostic functions
- Operating case temperature: 0°C~+70°C
- RoHS6 compliant (lead free)

Applications

- 200GBASE-SR4 Ethernet
- 100GBASE-SR4 Ethernet

Product Description

The TSQ2Q-85L-XXXDA is a 4-Channel, Pluggable, Parallel, Fiber-Optic 200G QSFP56 to 2X100G QSFP28 AOC. This transceiver is a high performance module for short-range multi-lane data communication and interconnect applications. It integrates 4 data lanes in each direction with 200Gbps bandwidth.

These modules are designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 38@QSFP56/ QSFP28 contact edge type connector

Absolute Maximum Rating

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameters	Symbol	Min.	Max.	Unit
Power Supply Voltage	VCC	-0.5	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Relative Humidity ¹	RH	15	85	%

Notes:

1. Non-condensing.

Recommended Operating Environment

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	VCC	3.15	3.30	3.45	V
Case Operating Temperature	Tca	0	-	70	°C
Fiber Bend Radius	Rb	3	-	-	cm


Electrical characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Differential Input Voltage Amplitude	Vin	300	-	900	mV
Differential termination mismatch	-	-	-	10	%
Input Logic Level High	VIH	2.0	-	VCC	V
Input Logic Level Low	VIL	0	-	0.8	V
Output Logic Level High	VOH	VCC-0.5	-	VCC	V
Output Logic Level Low	VOL	0	-	0.4	V

Notes:

1. Differential input voltage amplitude is measured between TxnP and TxnN.

Transceiver Electrical Pad Layout

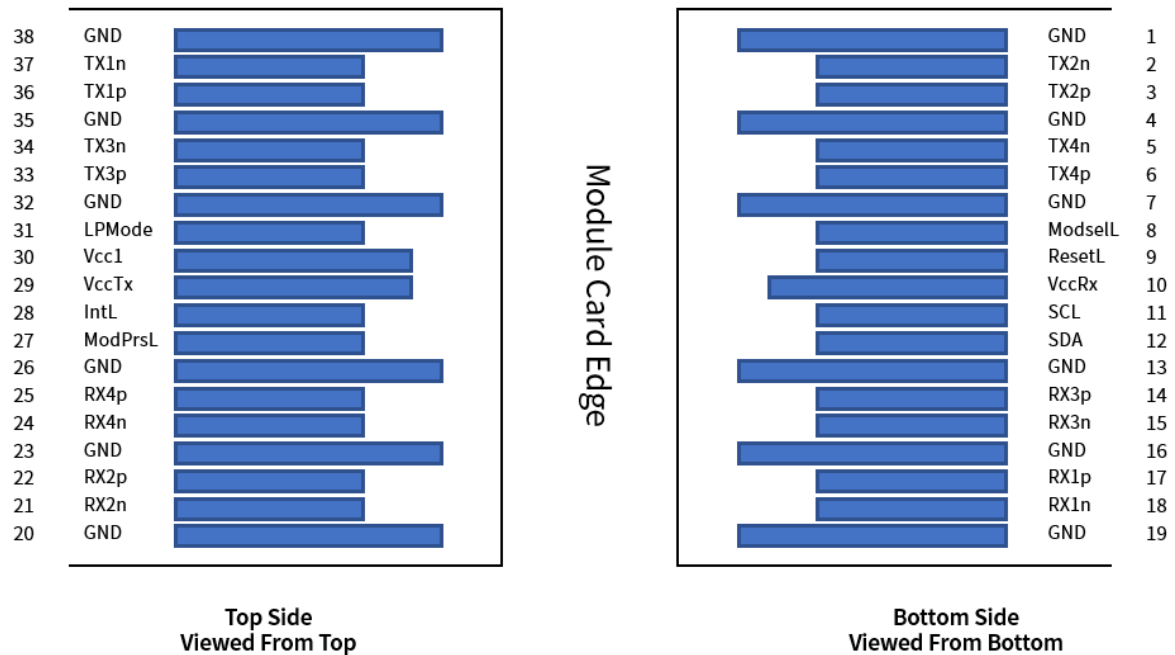

Pin Definition

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground


Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt
29	VCC Tx	+3.3 V Power supply transmitter
30	VCC1	+3.3 V Power Supply
31	LPMode	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Mechanical

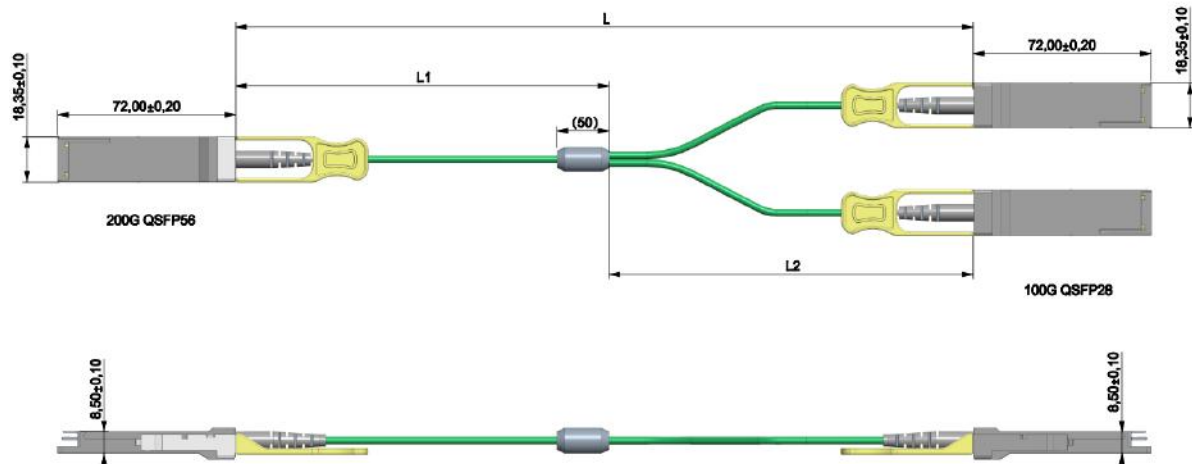


L	L1	L2
1m	0.3m	0.7m
2m	0.6m	1.4m
3m	1m	2m
≥ 5m	L-3m	3m

L tolerance:

L	Tolerance (mm)
$L \leq 1m$	+50/-0
$1m < L < 7m$	+100/-0
$L \geq 7m$	+2%L/-0

Cable Structure

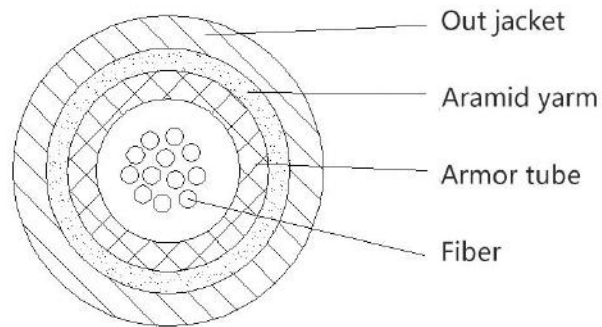

Cable Technical Parameters

Parameter	Symbol	Typical
Model		GJFKV
Fiber	Count	2~12
	Color	Blue, orange, green, brown, gray, white, red, black, yellow, purple, pink, aqua
Cable	OD (mm)	3.0 ± 0.1
	Material	PVC-OFNP
Armored tube	OD (mm)	1.8 ± 0.1
	ID (mm)	1.2 ± 0.1
Max.tensile Strength(N)	Short-term	150
	Long-term	80
Min.Bending Radius(mm)	Dynamic	20D
	Static	10D
Max.Crush Resistance(N/100mm)	Short-term	3000
	Long-term	1000
Strength Members		Aramid yarn
Temperature range	Storage or transportation	-20~70°C
	Operation	-20~60°C
	Installation	-20~60°C

Ordering Information

Part Number	Product Description
TSQ2Q-85L-XXXDA	200G BASE QSFP56 TO 2x100G BASE QSFP28 Armored AOC 0°C ~ +70°C

XXX :001~070,1~70 Length in meters on OM3 MMF

XXX :001~100,1~100 Length in meters on OM4 MMF

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.