



FC-ST

Hybrid Adapter

FC-ST Hybrid Adapter

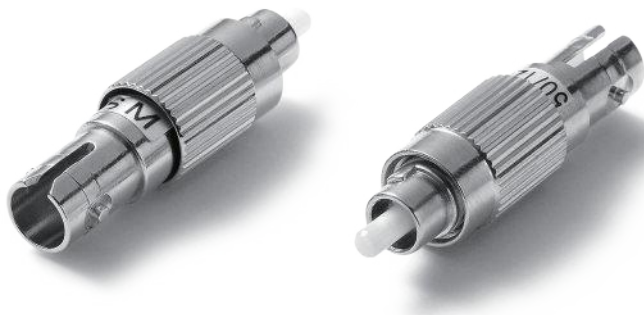

DIAGRAM

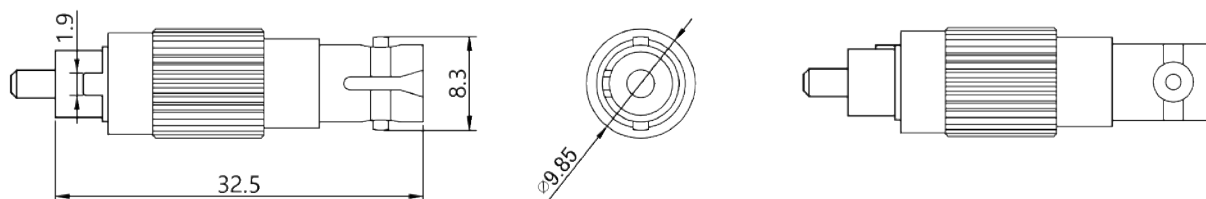

Specifications

Connector	FC, ST	Fiber Mode	9/125, 62.5/125, 50/125
Body Type	Simplex	Gender Type	Male to Female
Housing Material	Metal	Insertion Loss	≤0.5dB
Working Temperature	-25°C ~ +70°C	Durability	≥500 times

Ordering Information

Part Number	Description
AD.FCST.ME-S-ZR-16	Adapter FC/UPC to ST/UPC Hybrid, 9/125, Male to Female, Metal
AD.FCST.ME-S-ZR-17	Adapter FC/UPC to ST/UPC Hybrid, 62.5/125, Male to Female, Metal
AD.FCST.ME-S-ZR-18	Adapter FC/UPC to ST/UPC Hybrid, 50/125, Male to Female, Metal