



LC-SC

Hybrid Adapter

LC-SC Hybrid Adapter

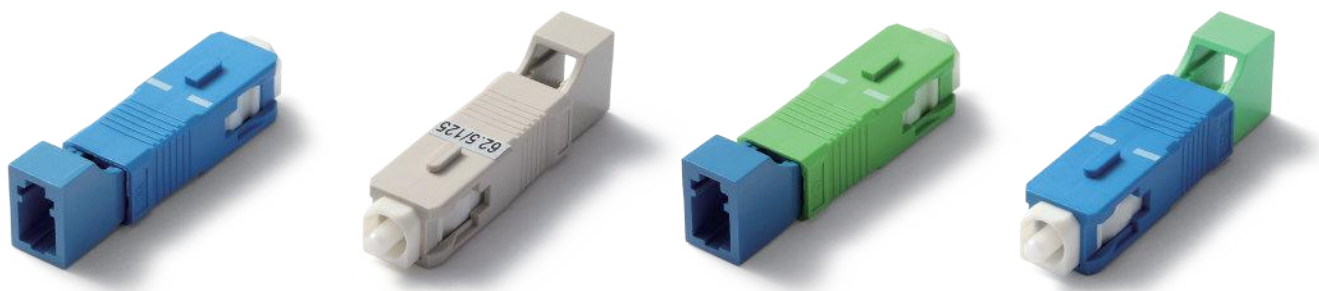

DIAGRAM

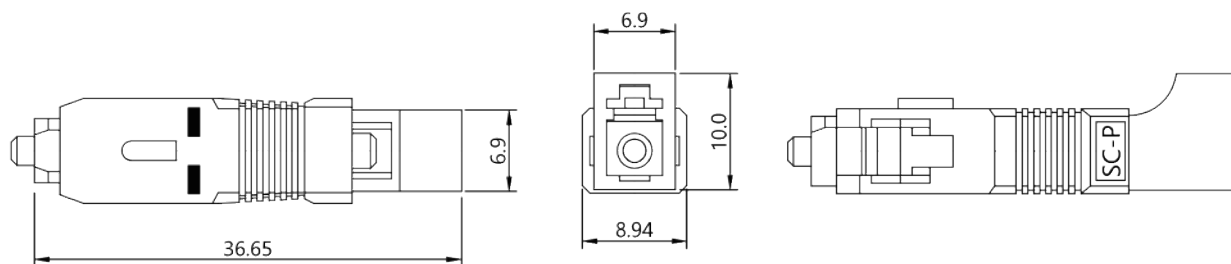

Specifications

Connector	LC, SC	Fiber Mode	9/125, 62.5/125, 50/125
Body Type	Simplex	Gender Type	Female to male
Housing Material	Plastic	Insertion Loss	≤0.5dB
Working Temperature	-25°C ~ +70°C	Durability	≥500 times

Ordering Information

Part Number	Description
AD.LCSC.BL-S-ZR-09	Adapter LC/UPC to SC/UPC Hybrid, 9/125, Female to male, Blue
AD.LCSC.BL-S-ZR-08	Adapter LC/UPC to SC/APC Hybrid, 9/125, Female to male, Blue & Green
AD.LCSC.BL-S-ZR-12	Adapter LC/APC to SC/UPC Hybrid, 9/125, Female to male, Green & Blue
AD.LCSC.BE-S-ZR-10	Adapter LC/UPC to SC/UPC Hybrid, 62.5/125, Female to male, Beige
AD.LCSC.BE-S-ZR-08	Adapter LC/UPC to SC/UPC Hybrid, 50/125, Female to male, Beige