


LC-ST Hybrid Adapter



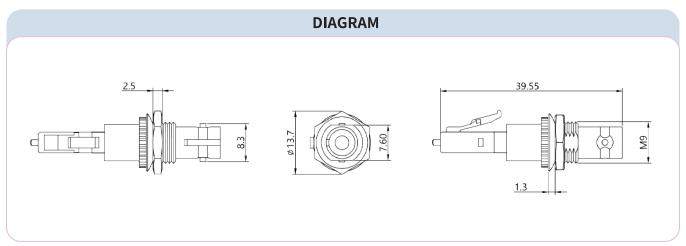

Specifications			
Connector	LC, ST	Fiber Mode	9/125, 62.5/125, 50/125
Body Type	Simplex	Gender Type	Male to Female
Housing Material	Plastic, Metal	Insertion Loss	≤0.5dB
Working Temperature	-25°C ~ +70°C	Durability	≥500 times

Ordering InformationPart NumberDescriptionAD.LCST.BL-S-ZR-01Adapter LC/UPC to ST/UPC Hybrid, 9/125, Male to Female, Blue & MetalAD.LCST.BE-S-ZR-02Adapter LC/UPC to ST/UPC Hybrid, 62.5/125, Male to Female, Beige & MetalAD.LCST.BE-S-ZR-01Adapter LC/UPC to ST/UPC Hybrid, 50/125, Male to Female, Beige & Metal