


Optical Transmit / Receive Components



Features

- Customized design and production are available
- Excellent stability, Reliability and Exchangeability
- Storage Temperature Range: -40°C~+85°C
- Both SC and LC receptacle are available

ROSA LC Receptacle

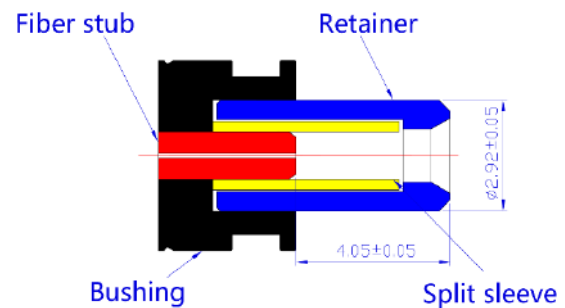

TOSA Receptacle

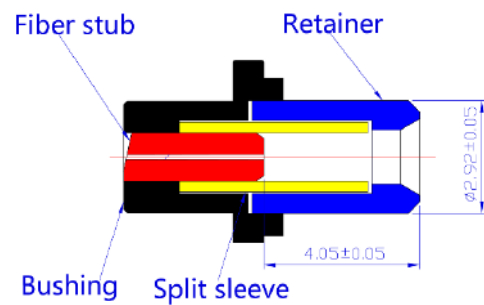

Specification

Stub Concentricity	(μm)	≤ 0.7
Insertion Loss	(dB)	≤ 0.2
Return Loss	(dB)	≥ 45
Split Sleeve	Ceramic	
Bushing	SUS 316F	
Retainer	SUS 316F	
Wiggle Test	IEC 62150-3-2012	