

SFP28 Active Optical Cables

TSSP-8525G-xxxC

Features

- Electrical interface compliant to SFF-8431
- 850nm VCSEL laser and PIN photo-detector
- Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF
- Hot Pluggable
- Built-in digital diagnostic functions
- RoHS compliant



Applications

- 25GBASE SR Ethernet
- Data Centers
- Infiniband transmission

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T_s	-20	85	°C
Relative Humidity	RH	0	85	%
Case Operating Temperature	T_{Case}	0	70	°C
Supply Voltage	V_{CC}	-0.3	3.6	V

Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Case Operating Temperature	T_{Case}	0	-	70	°C
Supply Voltage	V_{CC}	3.13	3.3	3.47	V
Supply Current	I_{CC}	0	-	300	mA
Data Rate	DR	-	25.78125		Gbit/s

Transmitter Specification

Parameter	Symbol	Min	Typical	Max	Unit
Input differential impedance	Z_{in}	90	100	110	Ohm
Differential Data Input Swing	V_{in}	300	-	1100	mVp-p
Transmit Enable Voltage	V_{EN}	-	-	0.8	V

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information.

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com




Transmit Disable Voltage	V_D	2.0	-	-	V
Average launch power	P_{AVG}	-7.5	-1	+2.5	dBm
Extinction Ratio	ER	2.0	-	-	dB
Center wavelength	λ_c	840	850	860	nm

Receiver Specification

Parameter	Symbol	Min	Typical	Max	Unit
Center wavelength	λ_c	840	850	860	nm
Differential Data Output Swing	V_{out}	500	-	800	mVp-p
Bit Error Rate	BER	-	-	10^{-12}	
Receiver Overload	P_{inmax}	2.5	-	-	dBm
Output Differential Impedance	Z_{out}	90	100	110	Ohm
LOS Fault	V_{OH}	2.4	-	-	V
LOS Normal	V_{OL}	-	-	0.4	V

Pin Descriptions

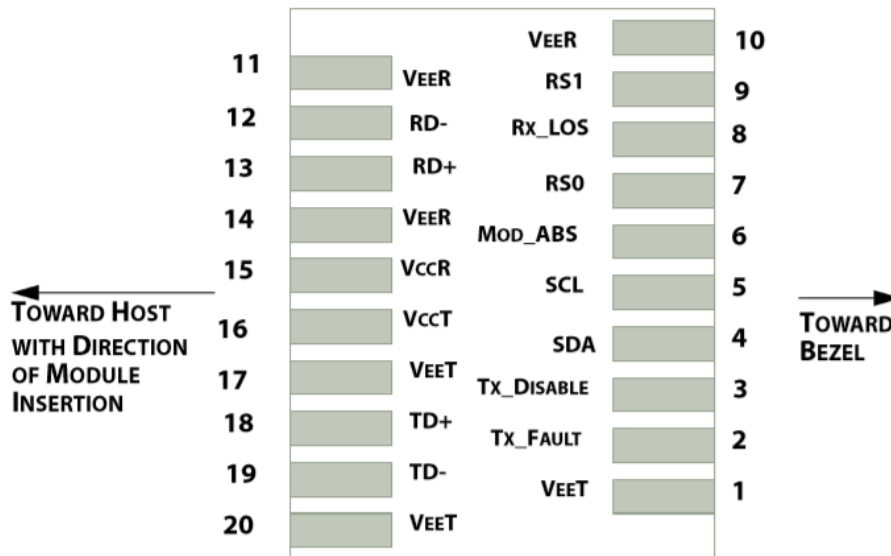

Pin Definitions


PIN	Symbol	Name/Description
1	VeeT	Transmitter Signal Ground
2	TX_FAULT	Transmitter Fault (LVTTTL-O) – Not used. Grounded inside the module
3	TX_DISABLE	Transmitter Disable (LVTTTL-I) – High or open disables the transmitter
4	SDA	Two Wire Serial Interface Data Line (LVCMOS – I/O)

Information and specifications are subject to change without notice. Please visit www.china-tscom.com for more information.



		(same as MOD-DEF2 in INF-8074)
5	SCL	Two Wire Serial Interface Clock Line (LVCMOS – I/O) (same as MOD-DEF1 in INF-8074)
6	MOD_ABS	Module Absent (Output), connected to VeeT or VeeR in the module
7	RS0	Rate Select 0 - Not used, Presents high input impedance.
8	RX_LOS	Receiver Loss of Signal (LVTTTL-O)
9	RS1	Rate Select 1 - Not used, Presents high input impedance.
10	VeeR	Receiver Signal Ground
11	VeeR	Receiver Signal Ground
12	RD-	Receiver Data Out Inverted (CML-O)
13	RD+	Receiver Data Out (CML-O)
14	VeeR	Receiver Signal Ground
15	VccR	Receiver Power + 3.3 V
16	VccT	Transmitter Power + 3.3 V
17	VeeT	Transmitter Signal Ground
18	TD+	Transmitter Data In (CML-I)
19	TD-	Transmitter Data In Inverted (CML-I)
20	VeeT	Transmitter Signal Ground

Mechanical Specifications

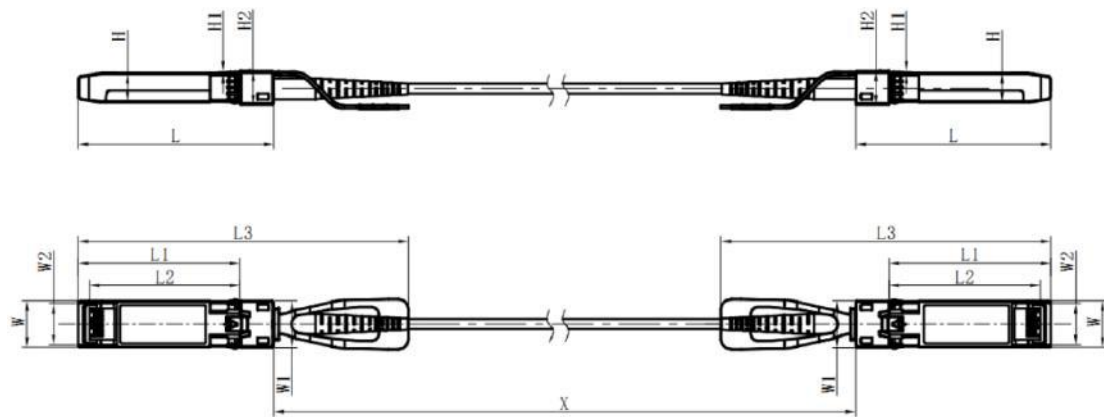

Unit: mm

	L	L1	L2	L3	W	W1	W2	H	H1	H2
MAX	57.75	48.0	44.65	102.5	13.75	14.0	12.25	8.65	0.55	10.4
Typical	57.55	47.8	44.45	101.5	13.65	13.9	12.15	8.55	0.5	10.2
MIN	57.35	47.6	44.25	100.5	13.55	13.8	12.05	8.45	0.45	10.0

Order Information

Part Number

TSSP-8525G-xxxC

xxx = denotes the AOC length with unit meter. For example, 001 denote 1m, 002 denote 2m ... 099 denote 99m.