

40G QSFP+ to 4×10G SFP+ Direct Attach Cable TSQSS-PC40G-xxM

General Description

QSFP+ Direct Attach Cables are compliant with the SFF-8436 specifications. SFP+ Direct Attach Cables are compliant with the SFF-8431, SFF-8432 and SFF-8472 specifications. Various choices of wire gauge are available from 30 to 24 AWG with various choices of cable length (up to 7m).

Features

- Up to 10.3125Gbps data rate per channel
- Up to 7m transmission
- Hot-pluggable QSFP+ 38 PIN footprint
- Compatible to SFF-8436
- Single 3.3V power supply
- Temperature Range: 0 °C to 70 °C
- RoHS compliant



Applications

- Low EMI radiation switches, servers and routers
- Data center networks
- Storage area networks
- High performance computing
- Telecommunication and wireless infrastructure
- Medical diagnostics and networking
- Test and measurement equipment

QSFP+ Pin Definition

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input


Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground
20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt
29	Vcc Tx	+3.3 V Power supply transmitter
30	Vcc1	+3.3 V Power Supply
31	LPMODE	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Pin Descriptions

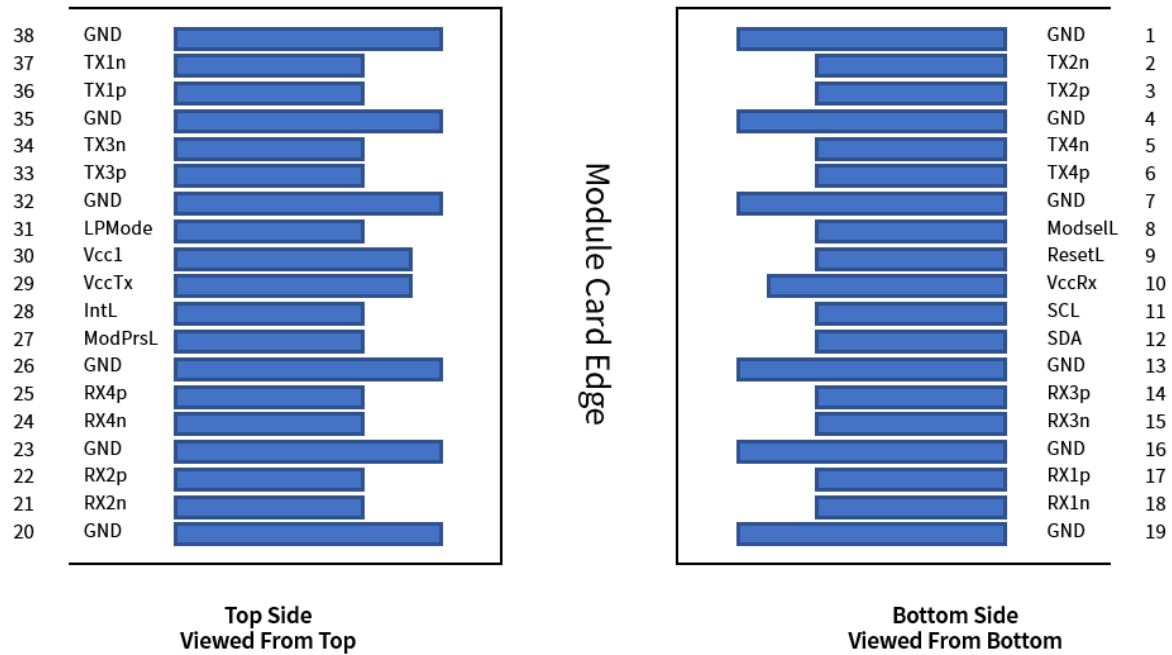


SFP+ Pin Definition

Pin	Symbol	Name/Description
1	VEET [1]	Transmitter Ground
2	Tx_FAULT [2]	Not used
3	Tx_DIS [3]	Not used
4	SDA [2]	2-wire Serial Interface Data Line
5	SCL [2]	2-wire Serial Interface Clock Line
6	MOD_ABS [4]	Module Absent. Grounded within the module
7	RS0 [5]	Not used
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1 [5]	Not used
10	VEER [1]	Receiver Ground
11	VEER [1]	Receiver Ground
12	RD-	Receiver Inverted DATA out. AC Coupled
13	RD+	Receiver DATA out. AC Coupled
14	VEER [1]	Receiver Ground
15	VCCR	Receiver Power Supply
16	VCCT	Transmitter Power Supply

17	VEET [1]	Transmitter Ground
18	TD+	Transmitter DATA in. AC Coupled
19	TD-	Transmitter Inverted DATA in. AC Coupled
20	VEET [1]	Transmitter Ground

Notes:

1. Module circuit ground is isolated from module chassis ground within the module.
2. should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. Tx_Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VccT inside the module.
4. Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.

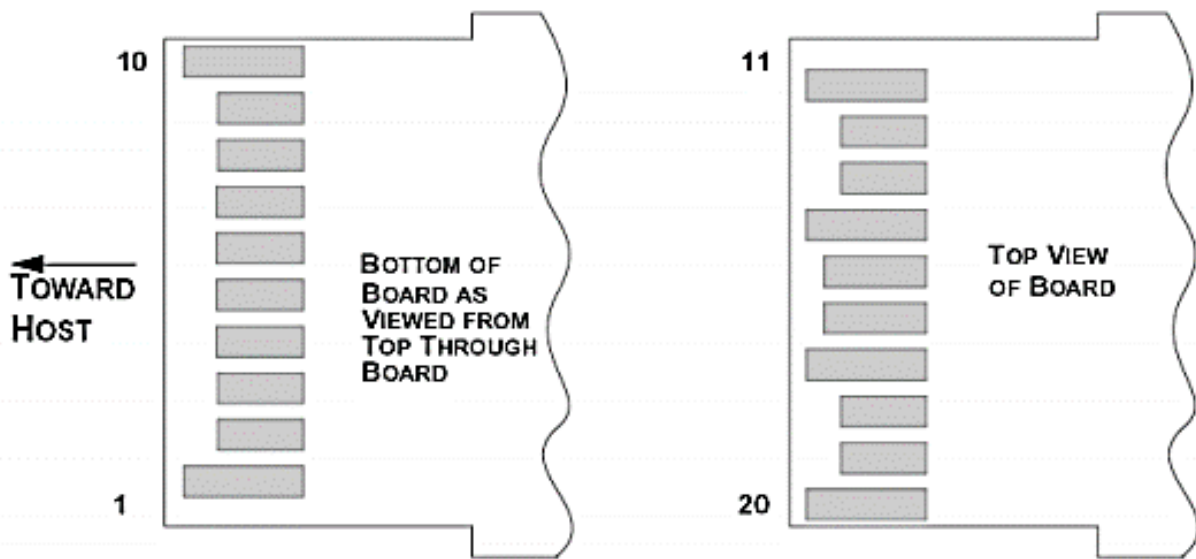**General Product Characteristics****QSFP+ TO 4SFP+ DAC Specifications**


Number of Lanes	Tx & Rx
Channel Data Rate	10.3125 Gbps
Operating Temperature	0°C to 70°C
Storage Temperature	-40°C to 85°C
Supply Voltage	3.3 V nominal
Electrical Interface	38 pins edge connector (QSFP+)
	20 pins edge connector (SFP+)
Management Interface	Serial, I2C

High Speed Characteristics

Parameter	Symbol	Min	Typ	Max	Units	Notes
Differential Impedance	Zd	90	100	110	Ω	-
Differential Input Return Loss	SDDXX	$<-12+2*\text{SQRT}(f)$ with f in GHz			dB	0.01~4.1GHz
		$<-6.3+13*\log_{10} f/5.5$ with f in GHz			dB	4.1~11.1GHz
Common Mode Output Return Loss	SCCXX	$<-7+1.6*f$ with f in GHz			dB	0.01~2.5GHz
		-	-	-3	dB	2.5~11.1GHz
Difference Waveform Distortion	dWDPC	-	-	6.75	dB	-
VMA Loss	L	-	-	4.4	dB	-
VMA Loss to Crosstalk Ratio	VCR	32.5	-	-	dB	-

Mechanical Dimensions

The connector is compatible with the SFF-8436 to SFF-8432 specification.

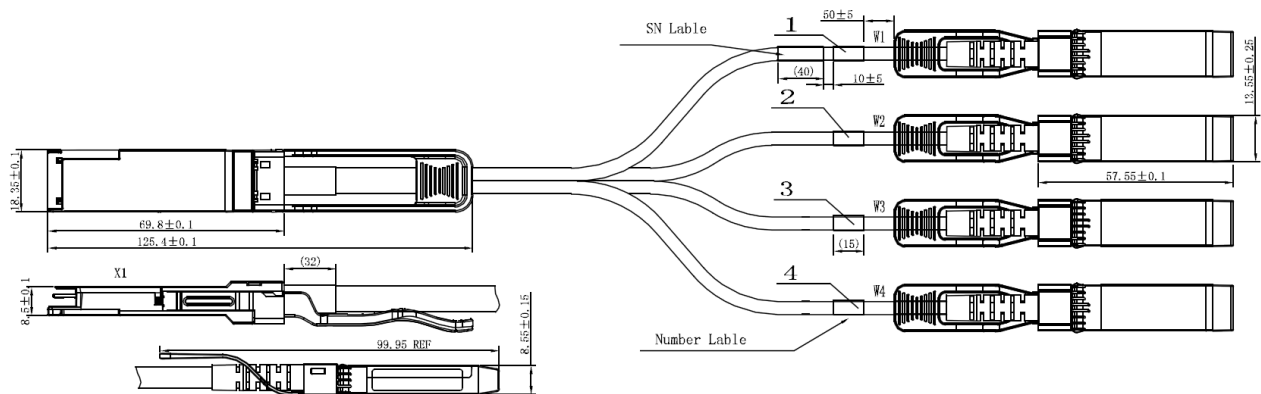

Length (m)	Cable AWG
1	30
3	30
5	26
7	26

Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the	MIL-STD-883C Method 3015.7	Class 1 (>2000 Volts)
Electromagnetic Interference(EMI)	FCC Class B	Compliant with Standards
	CENELEC EN55022 Class B	

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



	CISPR22 ITE Class B	
RF Immunity(RFI)	IEC61000-4-3	Typically show no measurable
RoHS Compliance	RoHS Directive 2011/65/EU and it's	RoHS 6/6 compliant