


TSQS-CW1HG-02LC Optical Transceiver

QSFP28 CWDM4 2km Transceiver, With Diagnostic Monitoring

Features

- Reach: 2 km via SMF
- Link budget assumes the use of KR4 FEC by the host
- Uncooled CWDM DFB lasers, directly modulated
- Electrical interface: retimed CAUI-4 per 100G Ethernet IEEE 802.3bm Annex 83E
- User controllable Transmit Input Equalization and Receiver Output Amplitude
- MSA-compliant performance monitoring via I2C interface
- Fiber connector: SMF LC duplex connector
- Hot pluggable
- 0–70°C operating temp
- Power dissipation < 3.5W
- RoHS6 compliant (lead free)

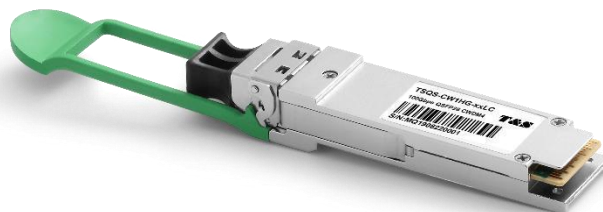

Applications

- 100G CWDM4 Ethernet
- InfiniBand 4x EDR

Description

The QSFP28 100G-CWDM4-2km module is a highly integrated 4x28G transceiver focused on reach, bandwidth, density and cost for high port-count 100G systems, and client-side 100G interfaces. It is compliant with the 100G 4WDM-10 MSA, which is based on the CWDM4 MSA version 1.1. It is interoperable with CWDM4 transceivers over a 2 km reach.

Optical Transmitter Performance

Parameter	Symbol	Min	Typical	Max	Unit	
Center Wavelength	Ch0	λ_0	1264.5	-	1277.5	nm
	Ch1	λ_1	1284.5	-	1297.5	nm
	Ch2	λ_2	1304.5	-	1317.5	nm
	Ch3	λ_3	1324.5	-	1337.5	nm
Bit Rate per Channel	B	25.78125±100ppm			Gb/s	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Average launch power, each lane	-	-6.5	-	2.5	dBm	
Optical Modulation Amplitude (each lane)	OMA	-4.0	-	2.5	dBm	
Launch power in OMA minus TDP, each lane	OMA-TDP	-5.0	-	-	dBm	
Transmission & dispersion penalty, each lane	TDP	-	-	3.0	dB	
RIN20 OMA	-	-	-	-130	dB/Hz	
Transmitter Reflectance	-	-	-	-12	dB	
Extinction Ratio	ER	3.5	-	-	dB	
Transmitter eye mask definition {X1, X2, X3, Y1, Y2, Y3}	{0.31, 0.4, 0.45, 0.34, 0.38, 0.4} CWDM4 MSA Technical Specifications Rev 1.1					
Total average launch power	-	-	-	8.5	dBm	
Average launch power of OFF transmitter, each lane	-	-	-	-30	dBm	
Optical return loss tolerance	-	-	-	20	dB	

Optical Receiver Performance

Parameter	Symbol	Min	Typical	Max	Unit	
Center Wavelength	Ch0	λ_0	1264.5	1271	1277.5	nm
	Ch1	λ_1	1284.5	1291	1297.5	nm
	Ch2	λ_2	1304.5	1311	1317.5	nm
	Ch3	λ_3	1324.5	1331	1337.5	nm
Bit Rate per Channel	B	25.78125±100ppm			Gb/s	
Unstressed Sensitivity (OMA) at 5 x 10 ⁻⁵ BER	OMAIN	-	-	-10	dB	
Stressed Sensitivity (OMA)	OMAIN, str	-	-	-7.3	dBm	
Receiver Reflectance	ORL	-	-	-26	dB	
Vertical eye closure penalty, each lane	VECP	-	-	1.9	dB	
Stressed eye J2 Jitter, each lane	J2	-	-	0.3	UI	
Stressed eye J9 Jitter, each lane	J9	-	-	0.5	UI	

Stressed eye J4 Jitter, each lane	J4	-	-	0.48	UI
SRS eye mask definition { X1, X2, X3, Y1, Y2, Y3}	{0.39, 0.5, 0.5, 0.39, 0.39, 0.4} CWDM4 MSA Technical Specifications Rev 1.1				
Damage threshold, each lane	-	3.5	-	-	dB

Recommended Operating Environment

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Power Supply Voltage	V _{CC}	3.135	3.300	3.465	V
Operating Case Temperature	T _C	0	25	70	°C

Pin Definition

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSelL	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground
20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt


Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information.

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com




29	Vcc Tx	+3.3 V Power supply transmitter
30	Vcc1	+3.3 V Power Supply
31	LPMode	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Pin Descriptions

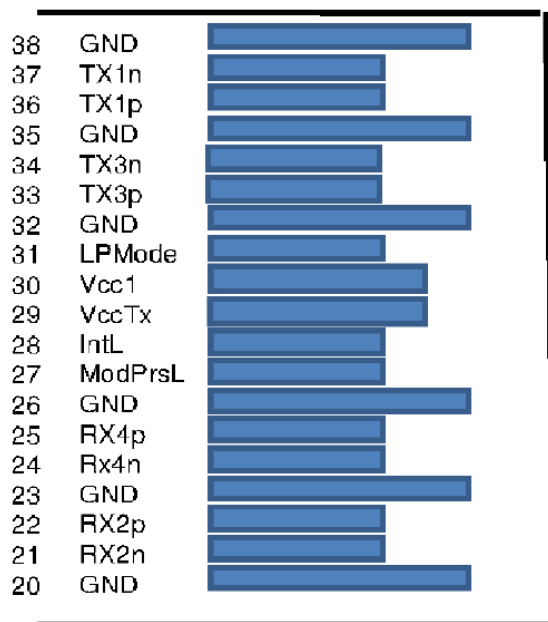

Top Side
Viewed From Top

Module Card Edge

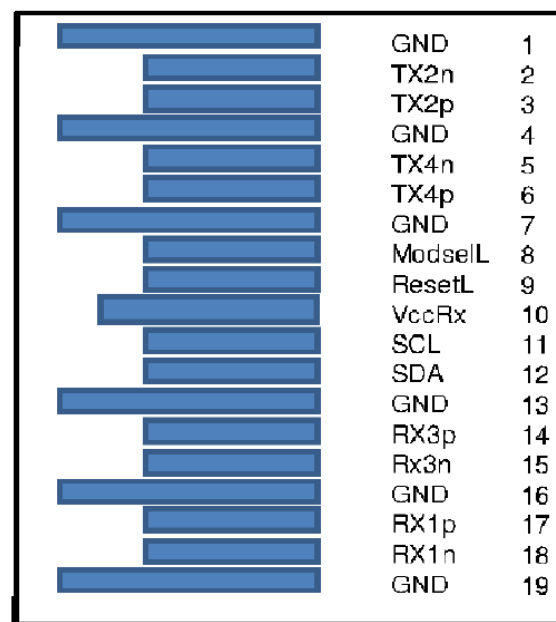

Bottom Side
Viewed From Bottom

Ordering Information

Part Number	Product Description
TSQS-CW1HG-02LC	100Gbps QSFP28 CWDM4 2km 0°C ~ +70°C

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In

accordance with the T&S policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.

