

TSQSQ-85H-XXXD/TSQSQ-85H-XXXU Active Optical Cables

56GBASE-SR4 QSFP+ Active Optical Cable, With Diagnostic Monitoring

Features

- Four-channel full-duplex active optical cable with QSFP+ plugs
- Data rate up to 14.0625 Gbps per lane
- Transmission distance up to 82m (OM2)/ 300m (OM3)
- Compliant to the SFF-8436 Specification
- VCSEL Array Transmitter and PIN Array Receiver
- Low Power Dissipation <1.4W per end
- RoHS compliant

Applications

- 40GBASE SR4 Ethernet
- Infiniband 4xFDR

Product Description

The TSQSQ-85H-XXXD/TSQSQ-85H-XXXU is a Four-Channel, Pluggable, Parallel, Fiber-Optic QSFP+ AOC for 40 Gigabit Ethernet, Infiniband FDR/EDR Applications. This transceiver is a high performance module for short-range multi-lane data communication and interconnect applications. It integrates four data lanes in each direction with 40Gbps bandwidth.

This module is designed to operate over multimode fiber systems using a nominal wavelength of 850nm. The electrical interface uses a 38 contact edge type connector.

Absolute Maximum Ratings

These values represent the damage threshold of the module. Stress in excess of any of the individual Absolute Maximum Ratings can cause immediate catastrophic damage to the module even if all other parameters are within Recommended Operating Conditions.

Parameter	Symbol	Min	Max	Unit
Power Supply Voltage	VCC	-0.5	+3.6	V
Storage Temperature	Tc	-40	+85	°C
Relative Humidity	RH	0	85	%

Recommended Operating Conditions

Recommended Operating Environment specifies parameters for which the electrical and optical characteristics hold unless otherwise noted.

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	VCC	3.15	3.30	3.45	V
Operating Case Temperature (Standard)	Tca	0	-	70	°C
Operating Case Temperature (Industrial)	Tca	-40	-	85	°C
Data Rate Per Lane	DR	-	14.0625	-	Gbps
Fiber Bend Radius	Rb	3	-	-	cm

Note:

1. Supply current is shared between VCCTX and VCCR_X.
2. In-rush is defined as current level above steady state current requirements.


Transmitter Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Input differential impedance	R _{in}	90	100	110	Ω
Differential Input Voltage swing, per lane	V _{in}	300	-	1100	mV
Transmit Disable Voltage	V _D	2.0	-	VCC+0.3	V
Transmit Enable Voltage	V _{en}	V _{ee}	-	V _{ee} +0.8	V

Receiver Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Differential Output Swing, per lane	V _{out}	200	-	1000	mV
Bit Error Rate	BER	-	-	10 ⁻¹²	-
Output Differential Impedance	R _{out}	90	100	110	Ω
Loss of Signal –Asserted	-	2.0	-	VCC+0.3	V
Loss of Signal –Negated	-	V _{ee}	-	V _{ee} +0.8	V

QSFP+ Transceiver Electrical Pad Layout

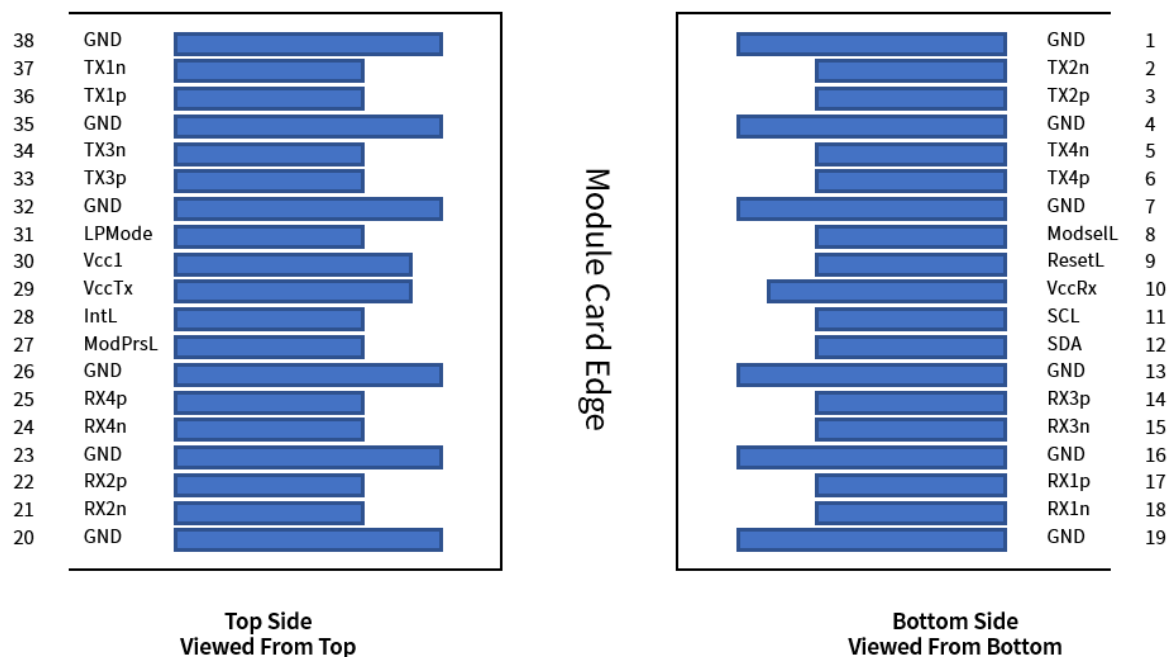


Pin Definitions

Pin	Symbol	Name/Description
1	GND	Ground
2	Tx2n	Transmitter Inverted Data Input
3	Tx2p	Transmitter Non-Inverted Data Input
4	GND	Ground
5	Tx4n	Transmitter Inverted Data Input
6	Tx4p	Transmitter Non-Inverted Data Input
7	GND	Ground
8	ModSell	Module Select
9	ResetL	Module Reset
10	Vcc Rx	+3.3 V Power supply receiver
11	SCL	2-wire serial interface clock
12	SDA	2-wire serial interface data
13	GND	Ground
14	Rx3p	Receiver Non-Inverted Data Output
15	Rx3n	Receiver Inverted Data Output
16	GND	Ground
17	Rx1p	Receiver Non-Inverted Data Output
18	Rx1n	Receiver Inverted Data Output
19	GND	Ground

20	GND	Ground
21	Rx2n	Receiver Inverted Data Output
22	Rx2p	Receiver Non-Inverted Data Output
23	GND	Ground
24	Rx4n	Receiver Inverted Data Output
25	Rx4p	Receiver Non-Inverted Data Output
26	GND	Ground
27	ModPrsL	Module Present
28	IntL	Interrupt
29	Vcc Tx	+3.3 V Power supply transmitter
30	Vcc1	+3.3 V Power Supply
31	LPMode	Low Power Mode
32	GND	Ground
33	Tx3p	Transmitter Non-Inverted Data Input
34	Tx3n	Transmitter Inverted Data Input
35	GND	Ground
36	Tx1p	Transmitter Non-Inverted Data Input
37	Tx1n	Transmitter Inverted Data Input
38	GND	Ground

Mechanical Specifications

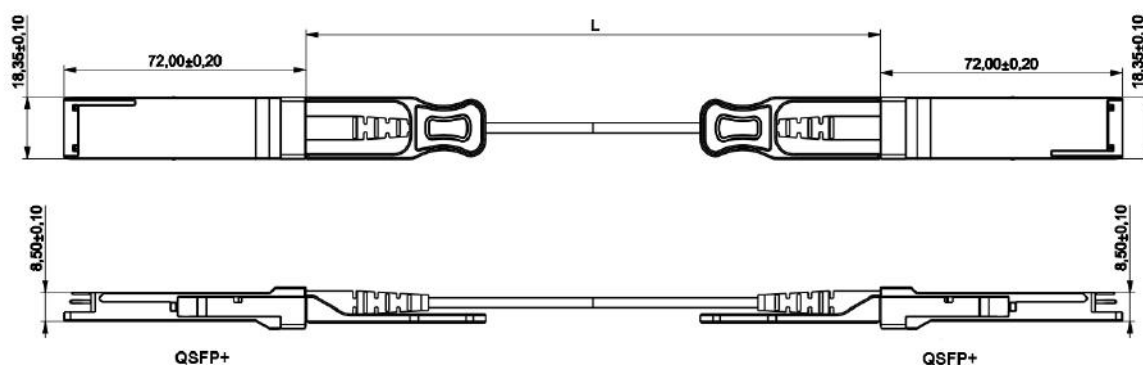

Unit: mm


AOC product bagging circle size:

L	Disc fiber diameter (mm)	number of circle
0.5m	Based on actual circling	1.5
1m		3.5
1.5m	90 Inner diameter, outer diameter 110	4.5
2m	100 Inner diameter, outer diameter 120	5.5
2.5m	110 Inner diameter, outer diameter 130	6.5
3m	100 Inner diameter, outer diameter 120	8.5
3m<L≤5m	110 Inner diameter, outer diameter 160	Not required
5m<L≤7m	110 Inner diameter, outer diameter 170	
7m<L≤30m	110 Inner diameter, outer diameter 180	
30m<L≤50m	110 Inner diameter, outer diameter 210	
50m<L≤100m	110 Inner diameter, outer diameter 250	

Length tolerance table:

L	Tolerance (mm)
L≤1 M	+70/-0
1 M<L<7 M	+100/-0
L≥7 M	+2% L/-0

Cable Structure

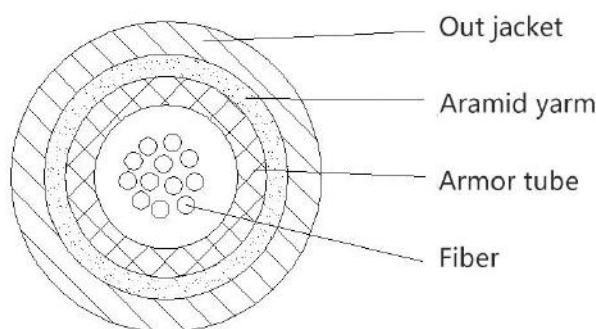

Cable Technical Parameters

Parameter	Symbol	Typical
Model		GJFKV
Fiber	Count	2~12
	Color	Blue, orange, green, brown, gray, white, red, black, yellow, purple, pink, aqua
Cable	OD (mm)	3.0±0.1
	Material	PVC-OFNP
Armored tube	OD (mm)	1.8±0.1
	ID (mm)	1.2±0.1
Max.tensile Strength(N)	Short-term	150
	Long-term	80
Min.Bending Radius(mm)	Dynamic	20D
	Static	10D
Max.Crush Resistance(N/100mm)	Short-term	3000
	Long-term	1000

Information and specifications are subject to change without notice.
Please visit www.china-tscom.com for more information

8 Jinxiu Middle Road, Pingshan, Shenzhen, Guangdong, 518118, P. R. China
+86 755 32983688 | info@china-tscom.com | www.china-tscom.com



Strength Members		Aramid yarn
Temperature range	Storage or transportation	-20~70°C
	Operation	-20~60°C
	Installation	-20~60°C

Ordering Information

Part Number	Product Description
TSQSQ-85H-XXXD	56G QSFP+ Armored AOC 0°C ~ +70°C
TSQSQ-85H-XXXU	56G QSFP+ Armored AOC -40°C ~ +85°C

XXX :001~082,1~82 Length in meters on OM2 MMF

XXX :001~300,1~300 Length in meters on OM3 MMF

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by T&S before they become applicable to any particular order or contract. In accordance with the T&S policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of T&S or others. Further details are available from any T&S sales representative.