
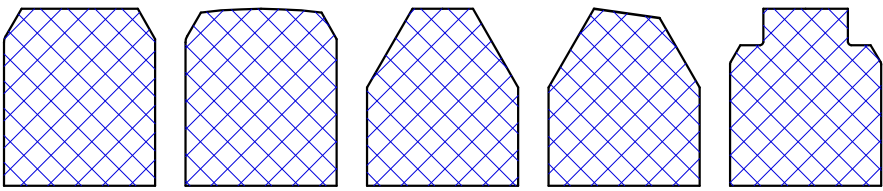


1	2	3	4	5	6																	
A	Variety of SC Ferrule Endface					A																
																						
	Flat	PC	Cone	Pre-angled	Step																	
B	FE.NS.XX-XXXX-LXXXX-X-XX					B																
	→ Entry number: 01 → Flange: 0/CU/SU → Length: L1050 → ID: 1253/1260 → OD: SC/LC/XX → NS: Non-Standard → FERRULE																					
C	NOTE: 1、REMOVE ALL BURRS AND BREAK SHARP EDGE 2、NO DIRT ON SURFACE 3、TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.1,±0.5° 4、PRODUCT MUST BE RoHS COMPLIANT					C																
D	<table><tr><td>△</td><td></td><td></td><td></td></tr><tr><td>△</td><td></td><td></td><td></td></tr><tr><td>△</td><td></td><td></td><td></td></tr><tr><td>NO.</td><td>DATE</td><td>NOTE</td><td>SIGN</td></tr></table>					△				△				△				NO.	DATE	NOTE	SIGN	D
△																						
△																						
△																						
NO.	DATE	NOTE	SIGN																			
1	2	3	4	5	6																	

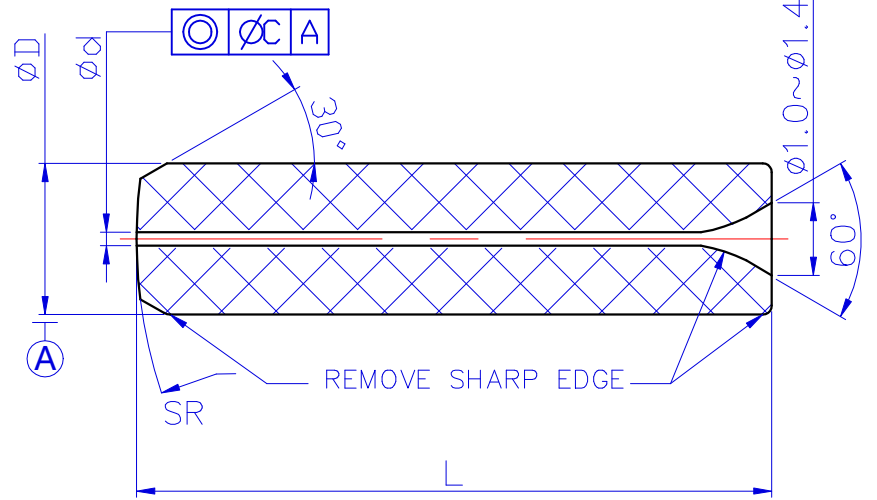

型 号	Part No.	FEN-LH-SC	FEN-LH-LC	FEN-LH-SMA	FEN-LH-SDL	
外 径	Outside Diameter	Ø2.4990	Ø1.2490	Ø3.1740	Ø0.7-Ø3.0	
外径公差	OD Tolerance	±0.001	+0.005/-0.0015	+0/-0.004	±0.001	
长 度	Length	10.50±0.05	6.40+0.1/-0	12.70±0.05	2.50~14.50	
内径区间	ID Range (um)	128~200	201~400	401~600	600~750	
内径公差	ID Tolerance (um)	≤5	≤10	≤10	≤20	
同 芯 度	Concentricity (um)	≤10	≤20	≤40	NA	
Title	Large Hole Ferrule		Material	ZrO2	Unit	mm
Dwg No.			Treatment		Scale	8:1
Drawn		Date			Ver.	0.1
Checked		Date				
Approved		Date		 T&S Communications Co.,Ltd.		